



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150






Δ Order Code : 1000-XX-S

Straight
Number of contact : 2 to 15 pin


**TTAF
APPROVAL**

Δ Material : Nylon 66 UL 94V-0
Pin Material : Brass/Tin-Plated

Voltage Rating : 100V AC,DC
Current Rating : 1A AC,DC
Withstanding Voltage : 500V/minute
Insulation Resistance : 500M Ω Min
Temperature Range : -25°C ~ + 85°C

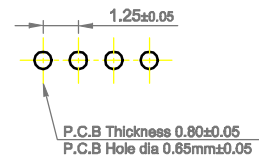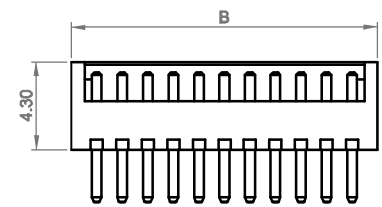

P.C.B. LAYOUT

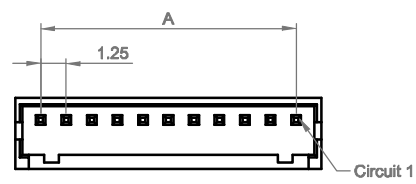

Contact No.	Dimensions(mm)	
	A	B
2	1.25	3.75
3	2.50	5.00
4	3.75	6.25
5	5.00	7.50
6	6.25	8.75
7	7.50	10.00
8	8.75	11.25
9	10.00	12.50
10	11.25	13.75
11	12.50	15.00
12	13.75	16.25
13	15.00	17.50
14	16.25	18.75
15	17.50	20.00

Date	15.04.2014	Rev.	-	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY						1000-XX-S		
Checked by	Fatih BOLACA								
							Drawing Nr.	Scale	Sheet No
								NONE	1/1