

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001->	±150

△ Order Code : 1211-XXP



Ⓐ

Number of contact : 2 to 16 pin



**TTAF
APPROVAL**

△ Material : Nylon 66 UL94V-0

Voltage Rating : 250V AC,DC
 Current Rating : 2A
 Withstanding Voltage : 800V AC/minute
 Insulation Resistance : 1000M Ω Min
 Temperature Range : -25 °C ~ + 85 °C

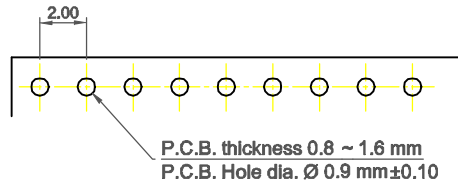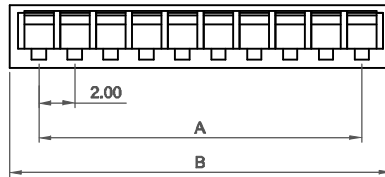

P.C.B. LAYOUT

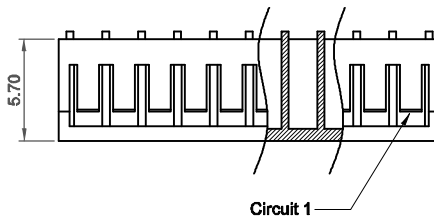

Contact No.	Dimensions(mm)	
	A	B
2	2.00	5.20
3	4.00	7.20
4	6.00	9.20
5	8.00	11.20
6	10.00	13.20
7	12.00	15.20
8	14.00	17.20
9	16.00	19.20
10	18.00	21.20
11	20.00	23.20
12	22.00	25.20
13	24.00	27.20
14	26.00	29.20
15	28.00	31.20
16	30.00	33.20

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1211-XXP		
Designed by	Yeşim AKSOY									Drawing Nr.		Scale	Sheet No
Checked by	Fatih BOLACA												



1

2

3

4

5

6

A4