
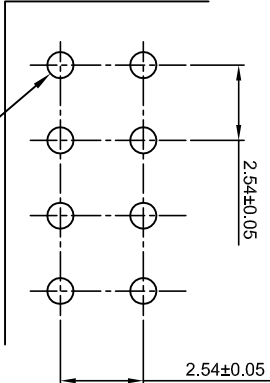


1 2 3 4 5

Δ Order Code : 1307-2\*XX-SCA



Number of contact : 1 to 40 pin

**TTAF**  
**APPROVAL**

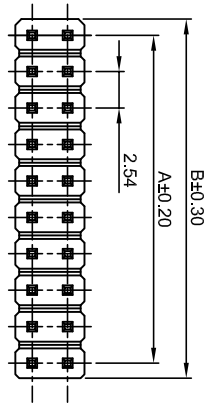

P.C.B. thickness 0.8 ~ 1.6 mm  
P.C.B. Hole dia. Ø 1.20 mm±0.05

- Δ Material : P.B.T+15%GF UL94V-0
- Pin.:Brass/Gold plated
- Voltage Rating : 350V AC,DC
- Current Rating : 3A.
- Withstanding Voltage : 1,000V AC/minute
- Insulation Resistance : 1,000M Ω Min.
- Temperature Range : -25 °C ~ + 85 °C
- Contact Resistance : 20M ohm max

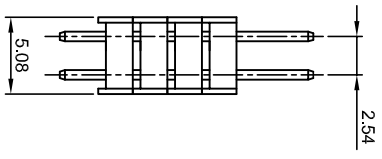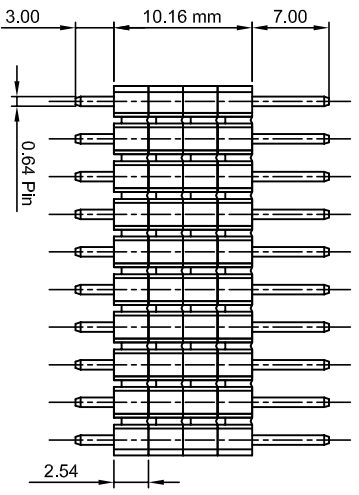

VIEW:	TOLERANCE
	.0
	±0.25
	.00
	±0.10
UNIT: mm	±0.05
	.000

Date	01.09.2006	Rev. No	-	Revision Detail	Rev.Dt.	Rev.by	Drawing Nr.	Model
Designed by	HELEN							
Checked by	N.ERGILER							



Project Name	1307-2x10-SCA	Scale	NONE	Sheet No	1/1
File Name	-				

1 2 3 4 5