

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
UNIT: mm	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150




Δ Order Code : 1307-XX-RLPA

Number of contact : 2 to 40 pin

**TTAF
APPROVAL**

Δ Material : P.B.T UL94V-0
Pin.:Brass/Gold plated

Voltage Rating : 250V AC,DC
Current Rating : 3A.
Withstanding Voltage : 1.000V AC/minute
Insulation Resistance : 1.000M Ω Min.
Temperature Range : -25 °C ~ + 85 °C
Contact Resistance : 20M ohm max

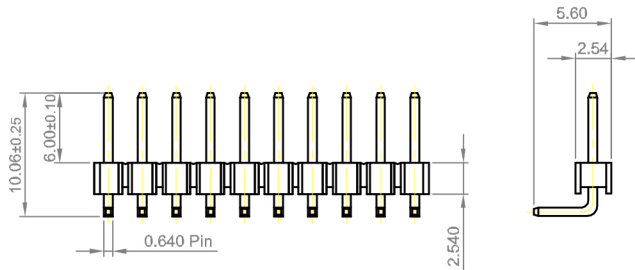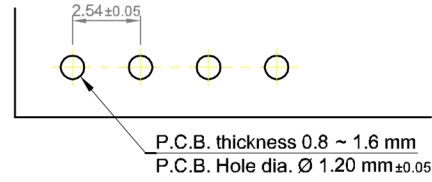

Contact No.	Dimensions(mm)	
	A	B
2	2.54	5.08
A:2.54x(PART NO. OF PIN-1) B:2.54x(PART NO. OF PIN)		
40	99.06	101.60

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1307-XX-RLPA
Designed by	Yeşim AKSOY	Checked by	Fatih BOLACA							Drawing Nr.	
										Scale	NONE
										Sheet No	1/1



1

2

3

4

5

6

A4