




Δ Order Code : 1307-XX-RCB

Number of contact : 2 to 40 pin

**TTAF
APPROVAL**

Δ Material : P.B.T UL94V-0
Pin.:Brass/Gold plated

Voltage Rating : 250V AC,DC
Current Rating : 3A.
Withstanding Voltage : 1.000V AC/minute
Insulation Resistance : 1.000M Ω Min.
Temperature Range : -25 °C ~ + 85 °C
Contact Resistance : 20M ohm max

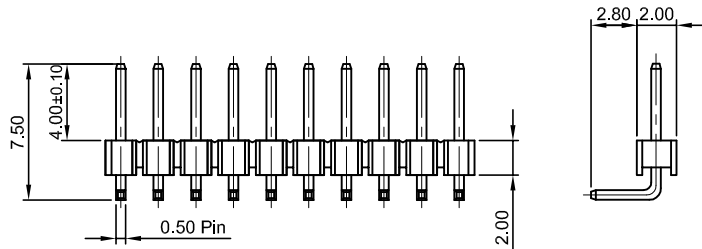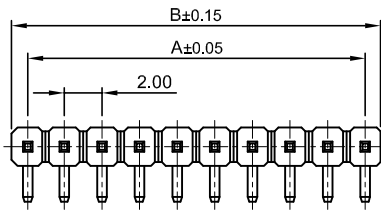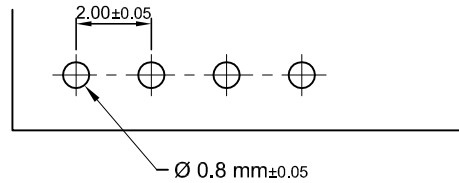

Contact No.	Dimensions(mm)	
	A	B
2	2.2	4.00
A:2.54x(PART NO. OF PIN-1) B:2.54x(PART NO. OF PIN)		
40	78.00	80.00

VIEW:	TOLERANCE	
	.0	±0.25
	.00	±0.10
UNIT: mm	.000	±0.05

Date	18.07.2007
Designed by	HELEN
Checked by	N.ERGLER



Rev. No	Revision Detail	Rev.Dt.	Rev.by	Drawing Nr.	Model
-	-	-	-	-	-
Project Name				1307-XX-RCB	
File Name			Scale	Sheet No	
-			NONE	1/1	