

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150




Δ Order Code : 1312-1-XX-H

Housing
Number of contact :
1x2 to 1x40 pin

**TTAF
APPROVAL**

Δ Material : PBT UL 94V-0

Voltage Rating : 250V AC,DC
Current Rating : 3A
Withstanding Voltage : 800V AC/minute
Insulation Resistance : 1000M Ω Min
Temperature Range : -25 °C ~ + 85 °C

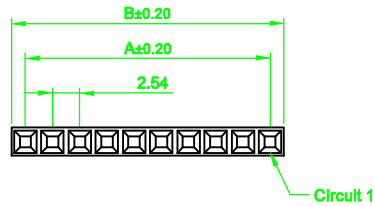

Contact No.	Dimensions(mm)	
	A	B
1		2.54
2	2.54	5.08
A: 2.54 x (Contact No. Of Pin-1) B: 2.54 x (Contact No. Of Pin)		
40	99.06	101.60

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1312-1-XX-H				
Designed by	Yeşim AKSOY														
Checked by	Fatih BOLACA														
										Drawing Nr.	-	Scale	NONE	Sheet No	1/1