


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001- >	±150

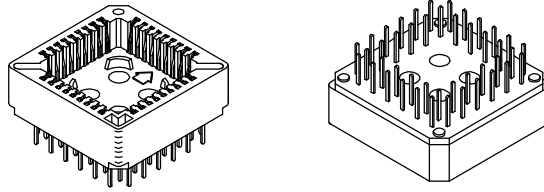



Δ Order Code : 1402-XX-P

Number of contact : 28 to 84 pin A

**TTAF
APPROVAL**

Δ Material : Pin - Phosphor Bronze
P.P.S UL94V-0 or P.B.T +40% Glass Fiber UL94V-0

Voltage Rating : 500V AC,DC
Current Rating : 1A AC
Withstanding Voltage : 600V AC/minute
Insulation Resistance : 1000M Ω Min
Temperature Range : -40 °C ~ + 85 °C

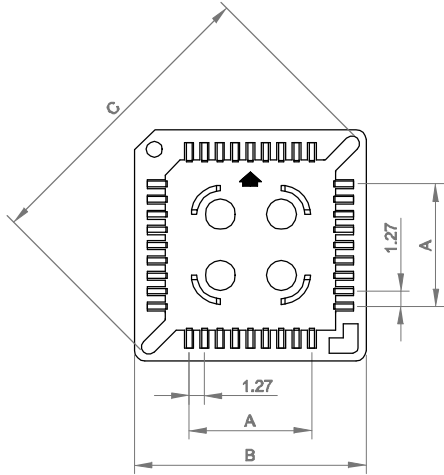

Contact No.	Dimensions(mm)			
	A	B	C	D
28	7.62	18.10	22.20	12.70
32	7.62	18.80	25.70	12.70
32	10.16	21.30	25.70	15.24
44	12.70	23.50	29.80	17.78
52	15.24	26.00	32.64	20.32
68	20.32	30.20	40.10	25.40
84	25.40	35.20	46.90	30.48

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1402-XX-P		
Designed by	Yeşim AKSOY									Drawing Nr.		Scale	Sheet No
Checked by	Fatih BOLACA									-		NONE	1/1



1

2

3

4

5

6

A4