

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001- >	±150

Δ Order Code : 1500-XX-H






Housing

Number of contact : 11,21,31 pin A

**TTAF  
APPROVAL**

Δ Material : Nylon 66 UL94V-0

Voltage Rating : 50V AC,DC  
 Current Rating : 1A.  
 Withstanding Voltage : 500V AC/minute  
 Insulation Resistance : 100M Ω Min  
 Temperature Range : -25 °C ~ + 85 °C

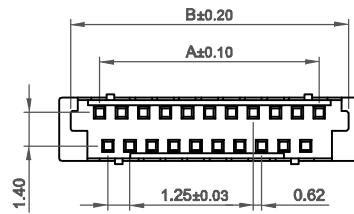

Contact No.	Dimensions(mm)		
	A	B	C
11	6.25	8.75	9.75
21	12.50	14.90	16.00
31	18.75	21.15	22.25

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1500-XX-H				
Designed by	Yeşim AKSOY									Drawing Nr.	-	Scale	NONE	Sheet No	1/1
Checked by	Fatih BOLACA														



1

2

3

4

5

6

A4