


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001- >	±150

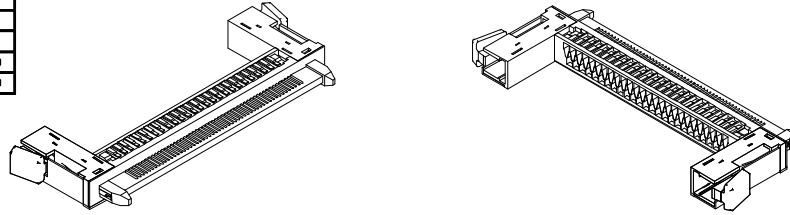



Δ Order Code : 1625-XX-H

Housing
Number of contact : 21,31,41
and 51 pin

**TTAF
APPROVAL**

Δ Material : Nylon 66 UL94V-0

Voltage Rating : 250V AC,DC
Current Rating : 2A
Withstanding Voltage : 1000V AC/minute
Insulation Resistance : 1000M Ω Min
Temperature Range : -25 °C ~ + 85 °C

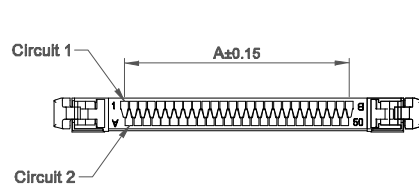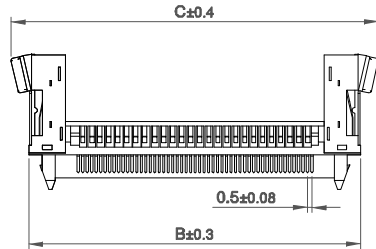

Contact No.	Dimensions(mm)		
	A	B	C
21	10.00	21.25	24.95
31	15.00	26.25	29.95
41	20.00	31.25	34.95
51	25.00	36.25	39.95

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1625-XX-H
Designed by	Yeşim AKSOY	Checked by	Fatih BOLACA							Drawing Nr.	
										Scale	NONE
										Sheet No	1/1



1

2

3

4

5

6

A4