
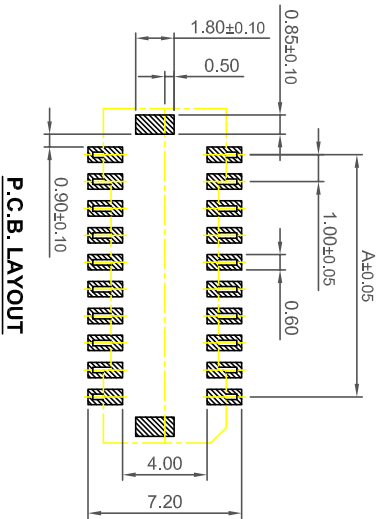




Δ Order Code : 1640-XX-S

Number of contact :
14,20,30,40,50 pin

**TTAF
APPROVAL**

Δ Material : PA9T UL94V-0
 PIN: Phosphor Bronze/Gold Plated
 Voltage Rating : 50V AC/DC
 Current Rating : 1A
 Withstanding Voltage : 1000V AC/minute
 Insulation Resistance : 1000M Ω Min
 Temperature Range : -25 °C ~ + 85 °C
 Contact Resistance : 20m Ω Max.

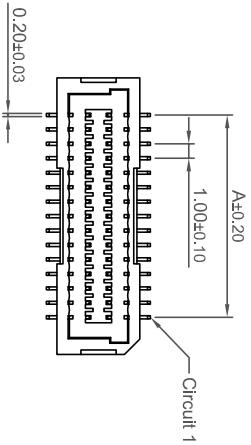

P.C.B. LAYOUT

Contact No.	Dimensions(mm)	
	A	B
14	6.00	10.70
20	9.00	13.00
30	14.00	18.00
40	19.00	23.00
50	24.00	28.00

VIEW:	TOLERANCE
	.0 ±0.25
	.00 ±0.10
UNIT: mm	.000 ±0.05

Date : 25.11.2006
 Designed by : HELEN
 Checked by : NERGİLER

Rev. No : -
 Revision Detail

Rev.Dt. : -
 Rev.by : -
 Drawing Nr. : -
 Model : -



Project Name : **1640-XX-S**
 File Name : -
 Scale : NONE
 Sheet No : 1/1