


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001- >	±150







Δ Order Code : 1640-XX-H

Housing
Number of contact :
14,20,30,40,50 pin


**TTAF
APPROVAL**

Δ Material : PBT UL94V-0

Voltage Rating : 50V AC,DC
Current Rating : 1A
Withstanding Voltage : 1000V AC/minute
Insulation Resistance : 1000M Ω Min
Temperature Range : -25 °C ~ + 85 °C



Circuit 1

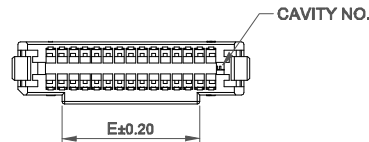

Contact No.	Dimensions(mm)				
	A	B	C	D	E
14	6.00	12.70	11.70	7.70	4.00
20	9.00	15.70	14.70	10.70	7.00
30	14.00	20.70	19.70	15.70	12.00
40	19.00	25.70	24.70	20.70	17.00
50	24.00	30.70	29.70	25.70	22.00

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	1640-XX-H		
Designed by	Yeşim AKSOY									Drawing Nr.		Scale	Sheet No
Checked by	Fatih BOLACA									-		NONE	1/1



1

2

3

4

5

6

A4