



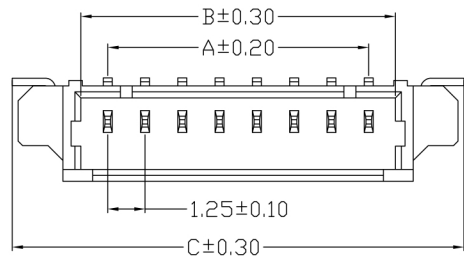


**TTAF
APPROVAL**




2P 图示



- Specifications :
- Voltage rating : 125V AC / DC
 - Current rating : 1A AC / DC
 - Withstanding voltage : 500V AC/minute
 - Temperature range : -25°C~+85°C
 - Insulation resistance : ≥100MΩ
 - Contact resistance : ≤20mΩ
 - After environmental testing : ≤30mΩ

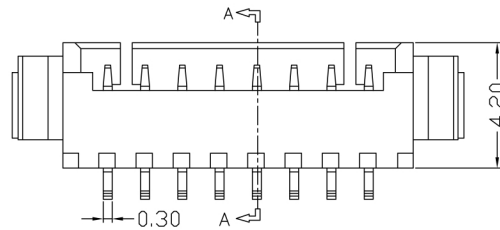


SEC A-A



3P 图示



Poles	Dimensions		
	A	B	C
2	1.25	3.05	7.65
3	2.50	4.30	8.90
4	3.75	5.55	10.15
5	5.00	6.80	11.40
6	6.25	8.05	12.65
7	7.50	9.30	13.90
8	8.75	10.55	15.15
9	10.00	11.80	16.40
10	11.25	13.05	17.65
11	12.50	14.30	18.90
12	13.75	15.55	20.15
13	15.00	16.80	21.40
14	16.25	18.05	22.65
15	17.50	19.30	23.90
16	18.75	20.55	25.15
17	20.00	21.80	26.40
18	21.25	23.05	27.65
19	22.50	24.30	28.90
20	23.75	25.55	30.15

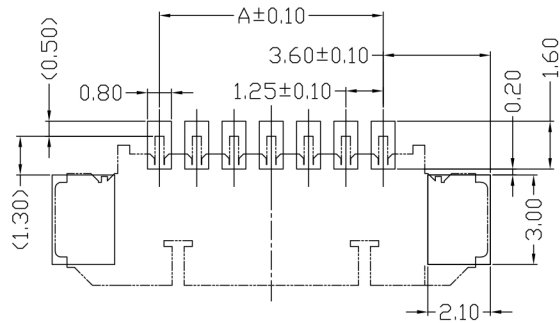

P.C.B LAYOUT

Date	30.11.2016	Rev		Revision Detail	Rev.Dt	Rev.by	Part No		
Designed by		-					1101-XXM		
Checked by	Fatih BOLACA								
							Drawing Nr.	Scale	Sheet No
								NONE	1/1