


| VIEW | TOLERANCE | |
|----------|-----------|------|
| | 0-10 | ±1 |
| | 11-250 | ±5 |
| | 251-500 | ±10 |
| | 501-1000 | ±20 |
| | 1001-3000 | ±50 |
| UNIT: mm | 3001-5000 | ±100 |
| | 5001- > | ±150 |

▲ Order Code : 200001-2M

**TTAF
APPROVAL**

Materiel PA66 GF
Temperature Range -40°C # +120°C

Current Rating
0,50mm² Kablo Max.6A
0,75mm² Kablo Max.7A
1,00mm² Kablo Max.8A
1,50mm² Kablo Max.11A

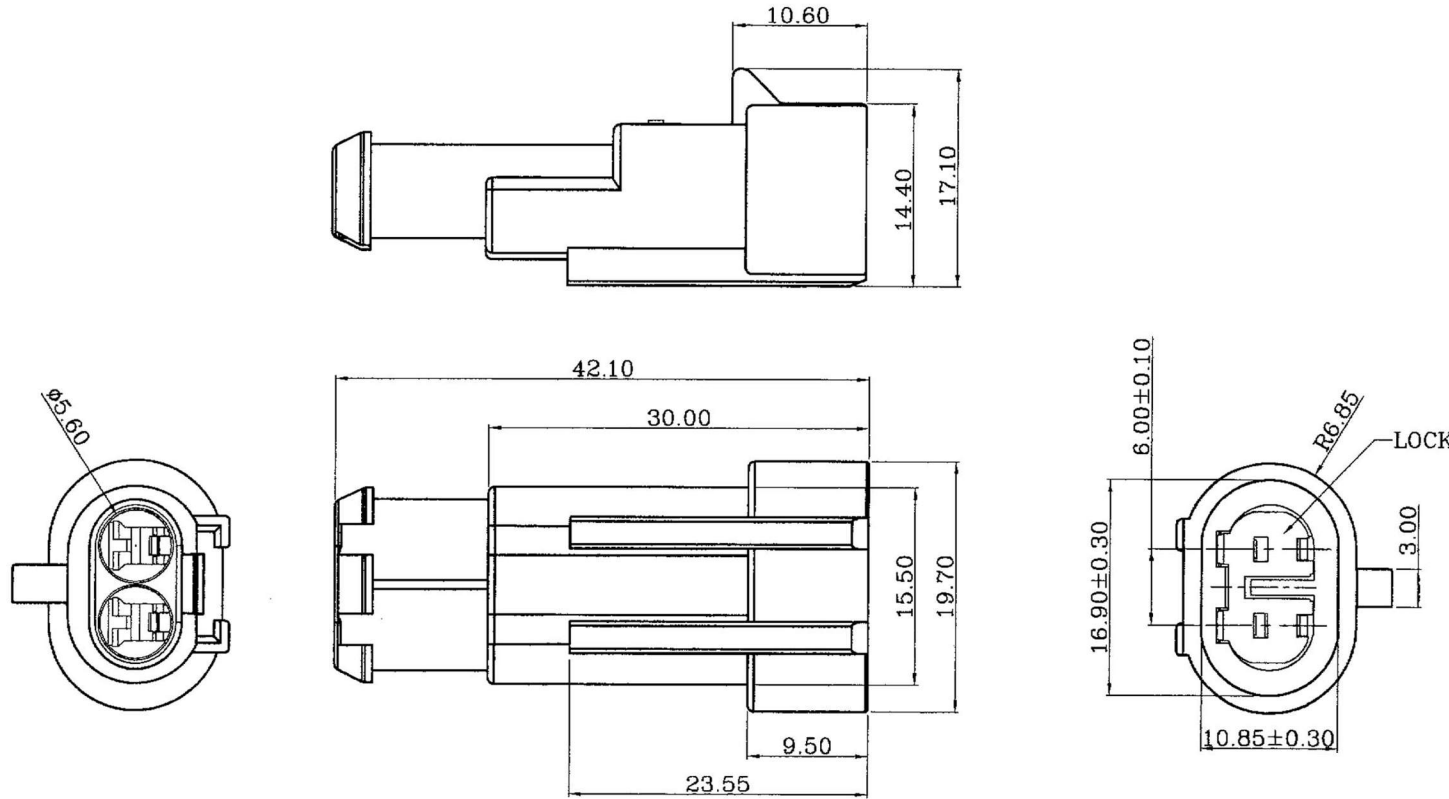

| Date | 22.10.2008 | Rev. | | Revision Detail | | Rev.Dt. | | Rev.by | | Part No | | | |
|-------------|--------------|------|---|-----------------|--|---------|--|--------|--|-----------|-------------|----------|-----|
| Designed by | Yeşim AKSOY | | - | | | | | | | 200001-2M | | | |
| Checked by | Fatih BOLACA | | | | | | | | | | Drawing Nr. | Scale | |
| | | | | | | | | | | | NONE | Sheet No | 1/1 |

