





| VIEW | TOLERANCE | |
|----------|-----------|------|
| | 0-10 | ±1 |
| | 11-250 | ±5 |
| | 251-500 | ±10 |
| | 501-1000 | ±20 |
| UNIT: mm | 1001-3000 | ±50 |
| | 3001-5000 | ±100 |
| | 5001- > | ±150 |

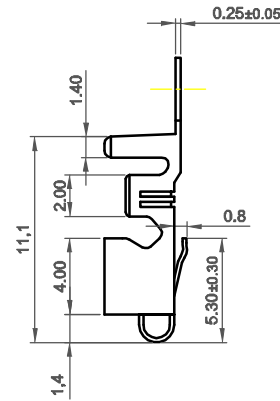


△ Order Code : 2001-TP


**TTAF
APPROVAL**

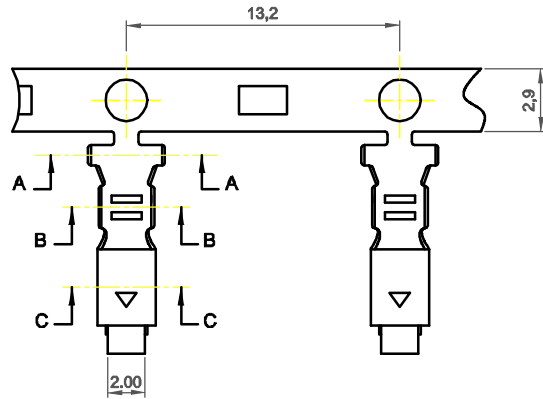

Sec:A-A



Sec:B-B



Sec:C-C

| Wire Range | Insulation O.D. | Material | Finish | Qty/reel |
|--------------|-----------------|----------|------------|-----------|
| AWG#16 - #18 | 2.80 mm(max) | Brass | Tin-Plated | 4.000 pcs |

| Date | 03.11.2014 | Rev. | - | Revision Detail | | Rev.Dt. | | Rev.by | | Part No | 2001-TP | | |
|-------------|--------------|------|---|-----------------|--|---------|--|--------|--|-------------|----------------|-------|----------|
| Designed by | Yeşim AKSOY | | | | | | | | | Drawing Nr. | | Scale | Sheet No |
| Checked by | Fatih BOLACA | | | | | | | | | - | | NONE | 1/1 |



1

2

3

4

5

6

A4