


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
UNIT: mm	5001- >	±150

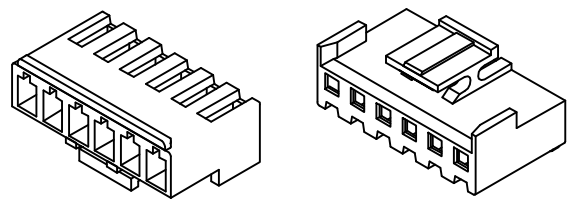

Δ Order Code : 2001-XX-H




Housing

Number of contact : 2 to 12 pin

**TTAF
APPROVAL**

Δ Material : Nylon 66 UL94V-0

Voltage Rating : 250V AC,DC
 Current Rating : 5A
 Withstanding Voltage : 1500V AC/minute
 Insulation Resistance : 1000M ohm/minute
 Temperature Range : -25 °C ~ + 85 °C



Circuit 1

Contact No.	Dimensions (mm)	
	A	B
1	-	4.18
2	3.96	8.12
3	7.92	12.08
4	11.88	16.04
5	15.84	20.00
6	19.80	23.96
7	23.76	27.82
8	27.72	31.88
9	31.68	35.84
10	35.64	39.80
11	39.60	43.76
12	43.56	47.72

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	2001-XX-H	
Designed by	Yeşim AKSOY									Drawing Nr.		-
Checked by	Fatih BOLACA									Scale		NONE
										Sheet No	1/1	