


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150

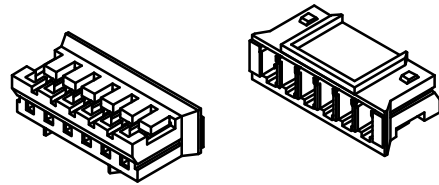

Δ Order Code : 200G1-XX-H



Housing

Number of contact : 2 to 16 pin


**TTAF  
APPROVAL**

Δ Material : Nylon 66, UL94V-0

Voltage Rating : 100V AC,DC  
 Current Rating : 2A  
 Withstanding Voltage : 800V AC/minute  
 Insulation Resistance : 1.000M Ω Min.  
 Temperature Range : -25 °C ~ + 85 °C

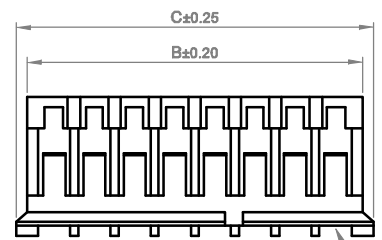

Circuit 1

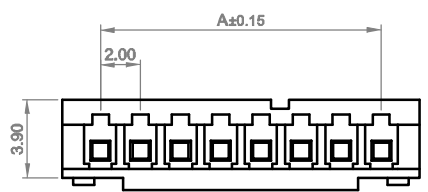

Contact No.	Dimensions (mm)		
	A	B	C
2	2.00	4.65	5.80
3	4.00	6.65	7.80
4	6.00	8.65	9.80
5	8.00	10.65	11.80
6	10.00	12.65	13.80
7	12.00	14.65	15.80
8	14.00	16.65	17.80
9	16.00	18.65	19.80
10	18.00	20.65	21.80
11	20.00	22.65	23.80
12	22.00	24.65	25.80
13	24.00	26.65	27.80
14	26.00	28.65	29.80
15	28.00	30.65	31.80
16	30.00	32.65	33.80

Date	04.02.2014	Rev.	-	Revision Detail	Rev.Dt.	Rev.by	Part No	
Designed by	Yeşim AKSOY						<b>200G1-XX-H</b>	
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
						-	NONE	1/1