

| VIEW | TOLERANCE | |
|----------|-----------|------|
| | 0-10 | ±1 |
| | 11-250 | ±5 |
| | 251-500 | ±10 |
| | 501-1000 | ±20 |
| UNIT: mm | 1001-3000 | ±50 |
| | 3001-5000 | ±100 |
| | 5001- > | ±150 |


△ Order Code : 200G1-XX-HL

Housing
Number of contact : 2 to 18 pin A

**TTAF
APPROVAL**

△ Material : Nylon 66 UL 94V-0

Voltage Rating : 250V AC,DC
Current Rating : 2A.
Withstanding Voltage : 800V AC/minute
Insulation Resistance : 1.000M Ω Min.
Temperature Range : -25 °C ~ + 85 °C

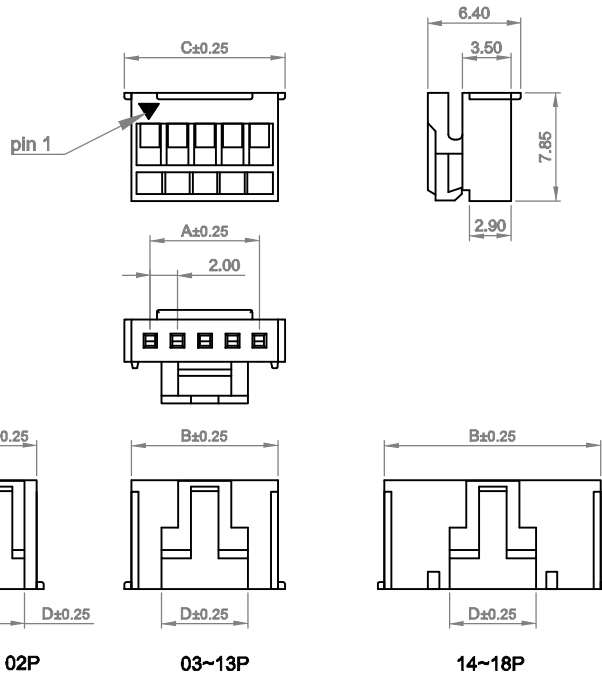

| Contact No. | Dimensions (mm) | | | |
|-------------|-----------------|-------|-------|-------|
| | A | B | C | D |
| 2 | 2.00 | 4.60 | 5.60 | 3.20 |
| 3 | 4.00 | 6.60 | 7.60 | 3.90 |
| 4 | 6.00 | 8.60 | 9.60 | 3.90 |
| 5 | 8.00 | 10.60 | 11.60 | 6.38 |
| 6 | 10.00 | 12.60 | 13.60 | 8.38 |
| 7 | 12.00 | 14.60 | 15.60 | 10.38 |
| 8 | 14.00 | 16.60 | 17.60 | 12.38 |
| 9 | 16.00 | 18.60 | 19.60 | 14.38 |
| 10 | 18.00 | 20.60 | 21.60 | 14.38 |
| 11 | 20.00 | 22.60 | 23.60 | 16.16 |
| 12 | 22.00 | 24.60 | 25.60 | 16.16 |
| 13 | 24.00 | 26.60 | 27.60 | 16.16 |
| 14 | 26.00 | 28.60 | 29.60 | 16.16 |
| 15 | 28.00 | 30.60 | 31.60 | 16.16 |
| 16 | 30.00 | 32.60 | 33.60 | 16.16 |
| 17 | 32.00 | 34.60 | 35.60 | 16.16 |
| 18 | 34.00 | 36.60 | 37.60 | 16.16 |

| Date | 05.02.2014 | Rev. | - | Revision Detail | | Rev.Dt. | | Rev.by | | Part No | 200G1-XX-HL | |
|-------------|-------------|------------|--------------|-----------------|--|---------|--|--------|--|-------------|--------------------|------|
| Designed by | Yeşim AKSOY | Checked by | Fatih BOLACA | | | | | | | Drawing Nr. | | - |
| | | | | | | | | | | Scale | | NONE |
| | | | | | | | | | | Sheet No | 1/1 | |



1

2

3

4

5

6

A4