


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
UNIT: mm	1001-3000	±50
	3001-5000	±100
	5001- >	±150

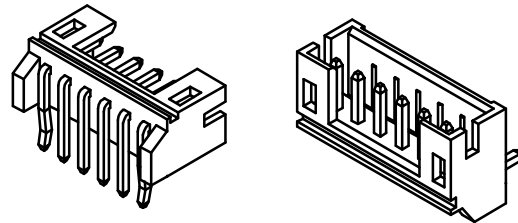



△ Order Code : 200G1-XX-R

Right Angle 90°  
Number of contact : 2 to 16 pin



**TTAF  
APPROVAL**

△ Material : Nylon 66, UL94V-0  
Pin: Brass/Tin-plated

Voltage Rating : 100V AC,DC  
Current Rating : 2A.  
Withstanding Voltage : 800V AC/minute  
Insulation Resistance : 1.000M Ω Min.  
Temperature Range : -25 °C ~ + 85 °C  
Contact Resistance : 20m ohm/max.

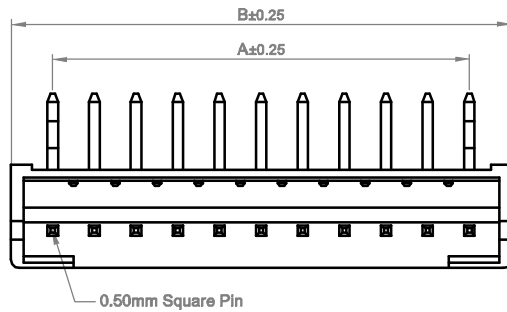

Contact No.	Dimensions (mm)	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

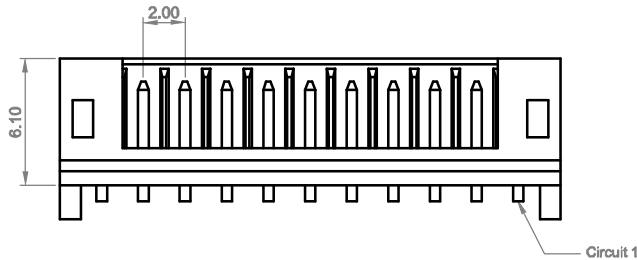

Date	-	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	200G1-XX-R		
Designed by	Yeşim AKSOY									Drawing Nr.	-	Scale	NONE
Checked by	Fatih BOLACA									Sheet No	1/1		

