



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001- >	±150



△ Order Code : 2220-XX-HA



Housing

Number of contact : 2 to 20 pin

**TTAF
APPROVAL**

△ Material : Nylon 66, UL94V-0

Voltage Rating : 250V AC,DC
 Current Rating : 5A.
 Withstanding Voltage : 1500V AC/minute
 Insulation Resistance : 1000M Ω Min
 Temperature Range : -25 °C ~ + 85 °C
 Contact Resistance : 10m Ω Max.

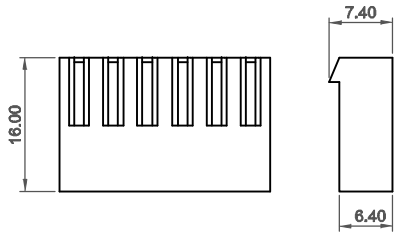

Contact No.	Dimensions(mm)	
	A	B
2	3.96	8.70
3	7.92	12.66
4	11.88	16.62
5	15.84	20.58
6	19.80	24.54
7	23.76	28.56
8	27.72	32.46
9	31.68	36.42
10	35.64	40.38
11	39.60	44.34
12	43.56	48.30
13	47.52	52.26
14	51.48	56.22
15	55.44	60.18
16	59.40	64.14
17	63.36	68.10
18	67.32	72.06
19	71.28	76.02
20	20.24	79.98

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	2220-XX-HA		
Designed by	Yeşim AKSOY									Drawing Nr.		Scale	Sheet No
Checked by	Fatih BOLACA												



1

2

3

4

5

6

A4