



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001- >	±150



△ Order Code : 2317-XX-HL




Housing

Number of contact : 2 to 16 pin

**TTAF
APPROVAL**

△ Material : Nylon 66 UL94V-0

Voltage Rating : 250V AC,DC
 Current Rating : 2A
 Withstanding Voltage : 1000V AC/minute
 Insulation Resistance : 1000M Ω Min
 Temperature Range : -25 °C ~ + 85 °C

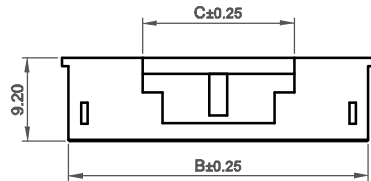

Contact No.	Dimensions (mm)		
	A	B	C
2	2.50	5.70	2.10
3	5.00	8.20	3.40
4	7.50	10.70	3.40
5	10.00	13.20	4.45
6	12.50	15.70	4.45
7	15.00	18.20	6.55
8	17.50	20.70	6.55
9	20.00	23.20	7.25
10	22.50	25.70	7.25
11	25.00	28.20	16.95
12	27.50	30.70	16.95
13	30.00	33.20	16.95
14	32.50	35.70	17.25
15	35.00	38.20	19.75
16	37.50	40.70	19.75

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	2317-XX-HL
Designed by	Yeşim AKSOY										
Checked by	Fatih BOLACA										
										Drawing Nr.	-
										Scale	NONE
										Sheet No	1/1