



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150



Order Code : 2317-XX-R



Right Angle

Number of contact : 2 to 20 pin



**TTAF  
APPROVAL**

Material : Nylon 66 UL94V-0  
PIN: Brass/Tin-plated


Voltage Rating : 250V AC,DC  
Current Rating : 2A.  
Withstanding Voltage : 1000V AC/minute  
Insulation Resistance : 1000M Ω Min  
Temperature Range : -25 °C ~ + 85 °C  
Contact Resistance : 20m Ω Max.

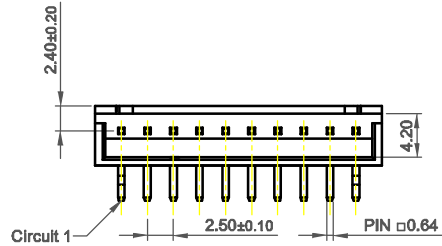

**P.C.B. LAYOUT**



With Kink



Without Kink

Contact No.	Dimensions (mm)	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50

Date	03.11.2014	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yeşim AKSOY	-				<b>2317-XX-R</b>		
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
						-	NONE	1/1