



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
UNIT: mm	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150



Δ Order Code : 2319-XX-H


Housing

Number of contact : 2 to 20 pin

**TTAF
APPROVAL**

Δ Material : Nylon 66 UL 94V-2

Voltage Rating : 250V AC,DC
 Current Rating : 2A
 Withstanding Voltage : 800V AC/minute
 Insulation Resistance : 1.000M Ω Min
 Temperature Range : -25 °C ~ +85 °C

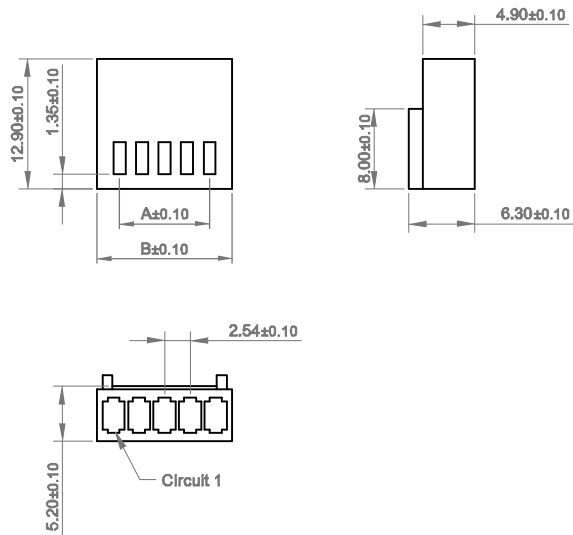

Contact No.	Dimensions(mm)	
	A	B
2	2.54	5.60
3	5.08	8.10
4	7.62	10.70
5	10.16	13.20
6	12.70	15.80
7	15.24	18.30
8	17.78	20.80
9	20.32	23.40
10	22.86	25.90
11	25.40	28.50
12	27.94	31.00
13	30.48	33.50
14	33.02	36.10
15	35.56	38.60
16	38.10	41.20
17	40.64	43.70
18	43.18	46.20
19	45.72	48.80
20	48.26	51.30

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	2319-XX-H
Designed by	Yeşim AKSOY										
Checked by	Fatih BOLACA										
										Drawing Nr.	-
										Scale	NONE
										Sheet No	1/1