



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
UNIT: mm	1001-3000	±50
	3001-5000	±100
	5001->	±150



△ Order Code : 2319-XX-R




Right Angle

Number of contact : 2 to 20 pin

**TTAF
APPROVAL**


△ Material : Nylon 66 UL 94V-2

Voltage Rating : 250V AC,DC
 Current Rating : 3A
 Withstanding Voltage : 800V AC/minute
 Insulation Resistance : 1.000M Ω Min
 Temperature Range : -25 °C ~ +85 °C

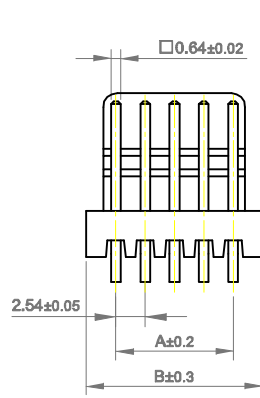

P.C.B. LAYOUT

Contact No.	Dimensions(mm)	
	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80



Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	2319-XX-R	
Designed by	Yeşim AKSOY	Checked by	Fatih BOLACA							Drawing Nr.		-
										Scale		NONE
										Sheet No	1/1	



1

2

3

4

5

6

A4