


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001- >	±150

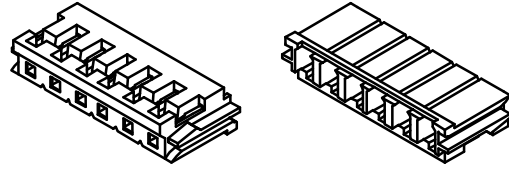

△ Order Code : 250G1-XX-H




Housing

Number of contact : 2 to 15 pin

**TTAF  
APPROVAL**

△ Material : Nylon 66, UL94V-0

Voltage Rating : 250V AC,DC  
 Current Rating : 2.5A  
 Withstanding Voltage : 800V AC/minute  
 Insulation Resistance : 1.000M Ω Min.  
 Temperature Range : -25 °C ~ + 85 °C



Contact No.	Dimensions (mm)	
	A	B
2	2.50	7.00
3	5.00	9.50
4	7.50	12.00
5	10.00	14.50
6	12.50	17.00
7	15.00	19.50
8	17.50	22.00
9	20.00	24.50
10	22.50	27.00
11	25.00	29.50
12	27.50	32.00
13	30.00	34.50
14	32.50	37.00
15	35.00	39.50

Date	05.03.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	<b>250G1-XX-H</b>	
Designed by	Yeşim AKSOY	Checked by	Fatih BOLACA							Drawing Nr.		Scale
										NONE	1/1	



1

2

3

4

5

6

A4