

VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
UNIT: mm	3001-5000	±100
	5001->	±150

Δ Order Code : 3920-XX-F



Female

Number of contact : 2 to 15 pin

**TTAF  
APPROVAL**

Δ Material : Nylon 66 UL 94V-0

Voltage Rating : 300V AC,DC  
 Current Rating : 10A AC,DC  
 Withstanding Voltage : 1500V AC/minute  
 Insulation Resistance : 1000M Ω Min  
 Temperature Range : -25 °C ~ + 85 °C

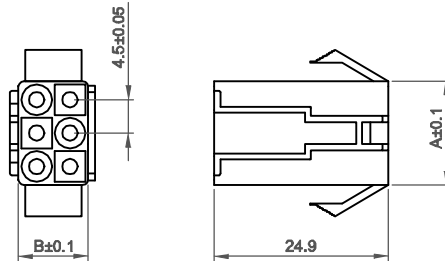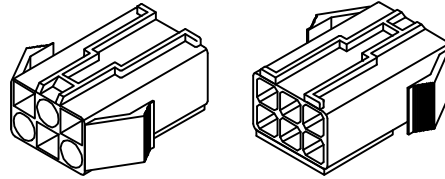

Contact No.	Dimensions(mm)	
	A	B
1x2	10.30	5.60
1x3	14.80	5.60
1x4	19.30	5.60
2x2	10.30	10.30
3x2	14.80	9.90
3x3	14.80	14.40
4x3	14.80	14.40
5x3	23.80	14.40

Date	03.11.2014	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	<b>3920-XX-F</b>		
Designed by	Yeşim AKSOY									Drawing Nr.		Scale	Sheet No
Checked by	Fatih BOLACA												



A

A

B

B

C

C

D

D

1

2

3

4

5

6

A4