


VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
UNIT: mm	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
	5001->	±150





Δ Order Code : 5557-XX-H

Housing
Number of contact : 2 to 24 pin

**TTAF
APPROVAL**

Δ Material : Nylon 66 UL94V-2

Voltage Rating : 250V AC,DC
Current Rating : 7A.
Withstanding Voltage : 1500V AC/minute
Insulation Resistance : 1000M Ω Min
Temperature Range : -25 °C ~ + 85 °C
Contact Resistance : 10m Ω Max.

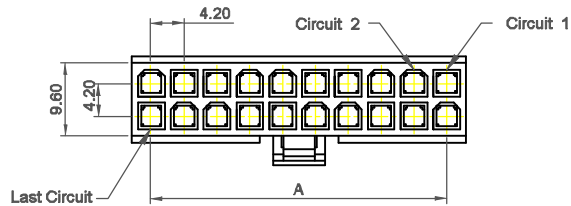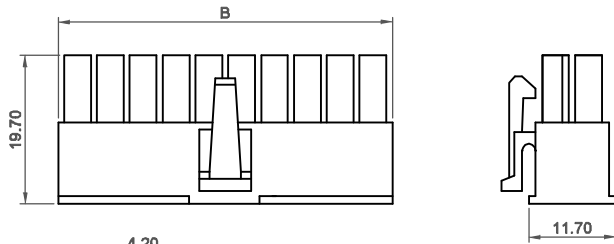

Contact No.	Dimensions(mm)	
	A	B
2	-	5.70
4	4.20	9.60
6	8.40	13.80
8	12.60	18.00
10	16.80	22.20
12	21.00	26.40
14	25.20	30.60
16	29.40	34.80
18	33.60	39.00
20	37.80	43.20
22	42.00	47.40
24	46.20	51.60

Date	03.11.2014	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yegim AKSOY	-				5557-XXH		
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
						-	NONE	1/1