
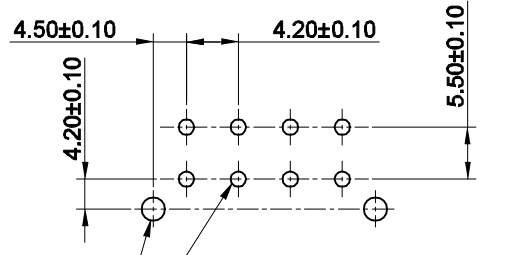



VIEW	TOLERANCE	
	0-10	±1
	11-250	±5
	251-500	±10
	501-1000	±20
	1001-3000	±50
	3001-5000	±100
UNIT: mm	5001->	±150

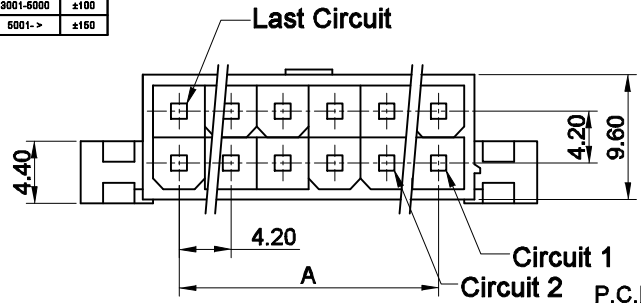


P.C.B. thickness 0.8 ~ 1.6 mm
P.C.B. Hole dia. Ø 3.20 mm±0.10
P.C.B. thickness 0.8 ~ 1.6 mm
P.C.B. Hole dia. Ø 1.4 mm±0.05

P.C.B LAYOUT

Contact No.	Dimensions	
	A	B
2	—	5.40
4	4.20	9.60
6	8.40	13.80
8	12.60	18.00
10	16.80	22.20
12	21.00	26.40
14	25.20	30.60
16	29.40	34.80
18	33.60	39.00
20	37.80	43.20
22	42.00	47.40
24	46.20	51.60

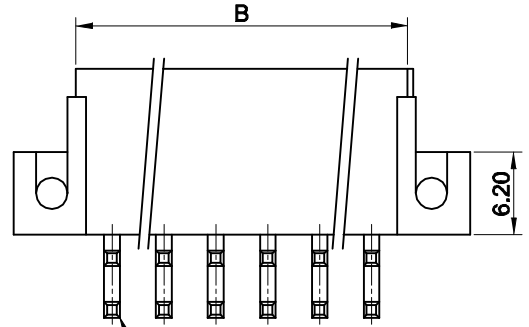

Pin 1.10 SQ

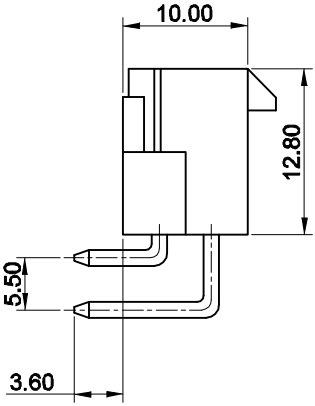

Rated Voltage : 250V AC,DC
Rated Current : 7A
Withstand Voltage : 1500V AC/minute
Insulation Resistance : 1.000M ohm/minute
Temperature Range : -25 °C ~ + 85 °C
Contact Resistance : 20m ohm/max.

* Order Code : 5557 - XX - R

* Material Pin.... Brass/Tin plated
Nylon 66, UL94V-2

Number of contact : 2 to 24 pin

Date	03.11.2014	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No		
Designed by	Yegim AKSOY	-				5557-XX-R		
Checked by	Fatih BOLACA							
						Drawing Nr.	Scale	Sheet No
						-	NONE	1/1

