


YS-7R10 CUSTOMIZED REED SENSOR FLATPACK



Electrical Characteristics	
Contact Arrangement	Form A (SPST)
Contact Material	PGM Alloy
Power Rating	10 VA Max
Switching Current	0.5 A
Carry Current	0.75 A
Switching Voltage	100 VDC , 125 VAC
Breakdown Voltage (Min @ 20AT)	200 VDC
Contact Resistance	150 milliohms
Insulation Resistance (Min)	10 ohms
Contact Capacitance	0.3 pf

Dimension in mm

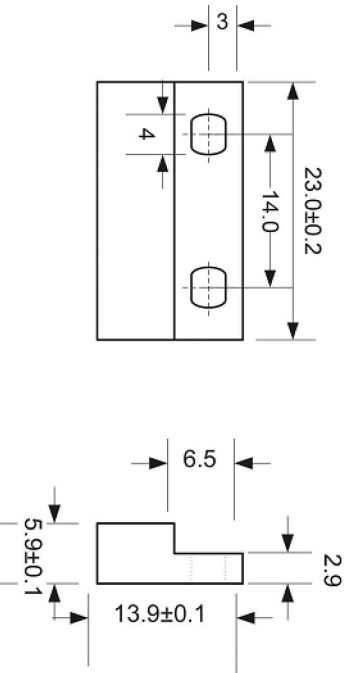

Date	-	Rev.	Revision Detail	Rev.Dt.	Rev.by	Part No
Designed by	Rabia MUZGAÇ					YS-7R10 CUSTOMIZED REED SENSOR FLATPACK
Checked by	Ersin YÜKSEL					
Drawing Nr.	-	Scale				Sheet No
		NONE				1/1

