


1 2 3 4 5 6

**TTAF  
APPROVAL**




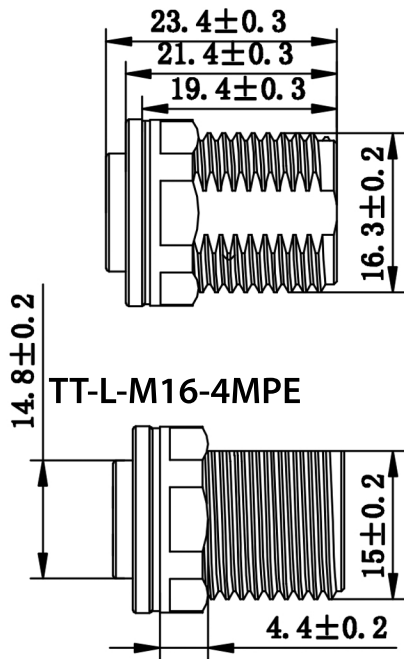


**TT-L-M16-4MPE**

**M16-Male**



**M16-Female**

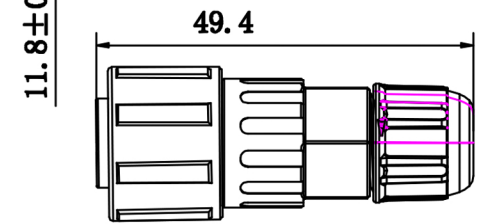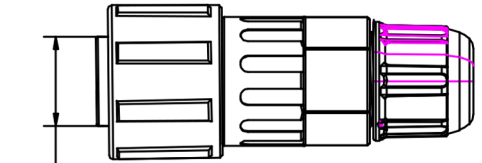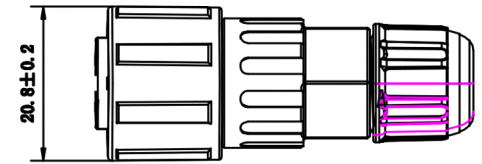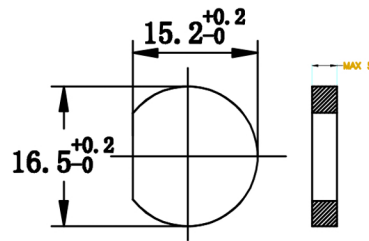

**TT-L-M16 4FSX**

**Material:**

Connector:Nylon+GF

Contact: Brass with Gold plated

**Specification:**

Current Rating: 10A(Ø1.5mm)

Voltage Rating: 300V/AC

Contact Resistance:<10mohm

Insulation Resistance: 100Mohm at 500V/DC

Breakdown Voltage:300V AC/1Minute 2mA

Temperature Rating: -40°C +105°C

Waterproof rating: IP68

Durability(Plug/Unplug): 2000times

Date	30.11.2016	Rev		Revision Detail	Rev.Dt	Rev.by	Part No		
Designed by	Yeşim AKSOY		-				TT-L-M16-3		
Checked by	Fatih BOLACA								
							Drawing Nr.	Scale	Sheet No
								NONE	1/1

1 2 3 4 5 6

A4