



**TTAF
APPROVAL**







TT-L-M16-4MPE

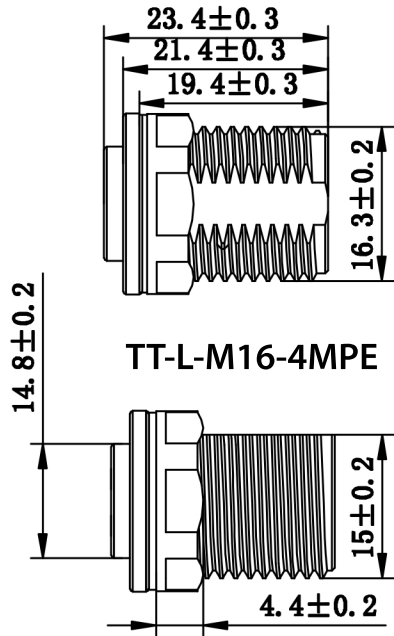

M16-Male



M16-Female

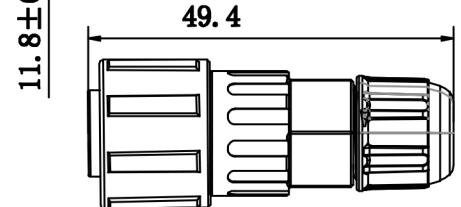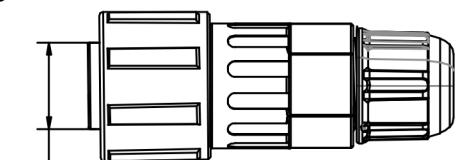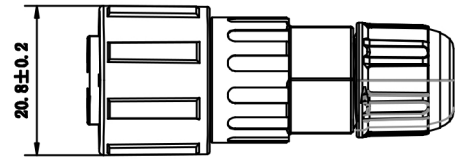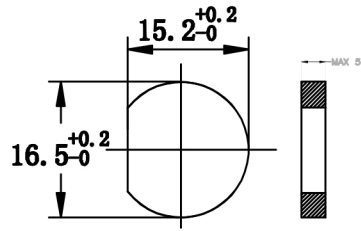

TT-L-M16 4FSX

Material:
 Connector: Nylon+GF
 Contact: Brass with Gold plated
Specification:
 Current Rating: 10A (Ø1.5mm)
 Voltage Rating: 300V/AC
 Contact Resistance: <10mohm
 Insulation Resistance: 100Mohm at 500V/DC
 Breakdown Voltage: 300V AC/1Minute 2mA
 Temperature Rating: -40°C +105°C
 Waterproof rating: IP68
 Durability (Plug/Unplug): 2000times

Date	30.11.2016	Rev		Revision Detail	Rev.Dt	Rev.by	Part No		
Designed by	Yeşim AKSOY		-				TT-L-M16-4		
Checked by	Fatih BOLACA								
							Drawing Nr.	Scale	Sheet No
								NONE	1/1