


1	Raw Material	PA66, SILICONE, COPPER ALLOY
	Certification	CQC/RoHS/CE
	Flame-resistant rating	UL94 V-0
	Level of protection	IP68
	Voltage rating/Current rating	450 V / 10 A
	Withstanding voltage	2500 V
	Cable gague	0.5~1mm ²
	Operating temperature	-40~105 °C





Female connector Male connector

TOLERANCE UNSPECIFIED			
X. ±0.35	X.XX ±0.10	X.X° ±3°	X.X° ±2°
X.X ±0.20	X.XXX ±0.05	XXX° ±1°	

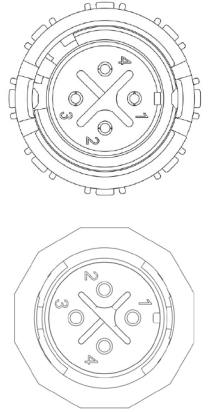

Rubbers Diameter

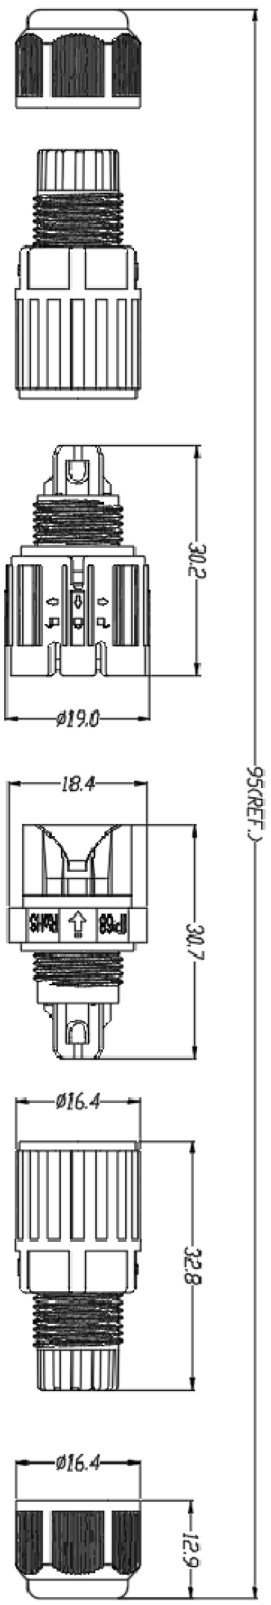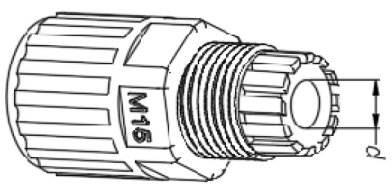

Part Number	Rubbers Diameter (d)	Outer Cable Diameter
WPI-M15-MF-Q4M10	φ 6.5 mm	φ 3.5~7 mm

Date	Rev.	Revision Detail	Rev./Dt.	Rev/by	Part No
Designed by					4 Pin Lehim Tipi Digi-Etiket Su Geçirmez Konnektor IP68
Checked by					
					Drawing Nr.
					Scale
					Sheet No
					1/1