



1	2	3	4	5	6
Raw Material	PA66, COPPER ALLOY, SILICONE				
CERTIFICATION	CQC/UL/TUV/RoHS/CE				
Flame-resistant rating	UL94 V-2				
Level of protection	IP68				
Voltage rating/Current rating	450V / 16A				
Withstanding voltage	2500V				
Cable gague	0.5mm ² ~2.5mm ²				
Operating temperature	-40°C~+105°C				








3 Pin



TOLERANCE UNSPECIFIED					
X. ±0.35	X.XX ±0.10	X.° ±3°	X.X° ±2°	X.XX° ±1°	
X.X ±0.20	X.XXX ±0.05				



Rubbers Diameter

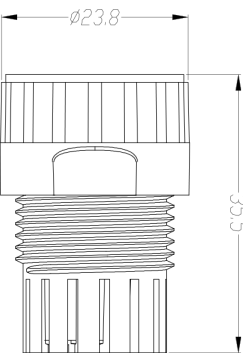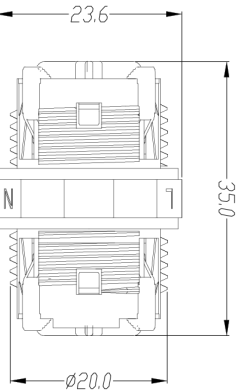

Part Number	Rubbers Diameter	Outer Cable Diameter
WPI-P20-03M16	ø 11.5mm	ø 9-12mm

Date	-	Rev.	-	Revision Detail	Rev/Dt.	Rev/by	Part No
Designed by	Rabia MUZAC						3 Pin Vidasız Su Geçirmezli Konnektor IP68
Checked by	Esin YÜKSEL						Drawing Nr. WPI-P20-03M16
							Scale NONE
							Sheet No 1/1