



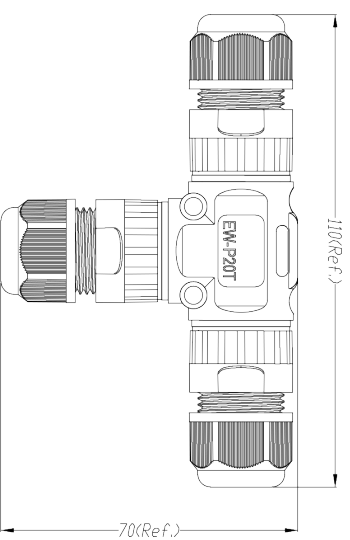



1	Raw Material	PA66, COPPER ALLOY, SILICON
1	CERTIFICATION	CQC/TUV/RoHS/CE
1	Flame-resistant rating	UL94 V-2
1	Level of protection	IP68
1	Voltage rating/Current rating	450V / 16A
1	Withstanding voltage	1500V
1	Cable gague	0.5mm ² ~2.5mm ²
1	Operating temperature	-40°C ~+105°C



3Pin

TOLERANCE UNSPECIFIED		
X. ±0.35	X.XX ±0.10	X.° ±3°
X.X ±0.20	X.XXX ±0.05	X.X° ±2°
		X.XX° ±1°

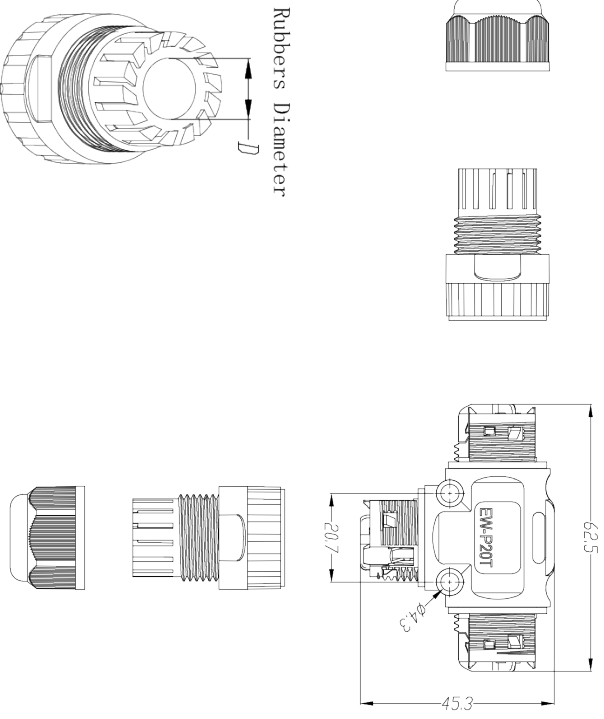

Part Number	Rubbers Diameter	Outer Cable Diameter
WPT-P20T-03M16	∅11.5mm	∅9-12mm

Date	Designed by	Checked by	Rev.	Revision Detail	Rev/Dt.	Rev/by	Part No
-	Rabia MUZAC	Esin YÜKSEL	-				3 Pin Vidaşız Su Geçirmez T Konnektör IP68
							Drawing No. WPT-P20T-03M16
							Scale NONE
							Sheet No 1/1



1 2 3 4 5 6 A4