THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - MATED WITH: PASSEND ZU: 967325, 968968
© COPYRIGHT 2011 - ALL RIGHTS RESERVED.

LOC	DIST
A1	-

PROJEKT NR.: A92-52069

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D4	REVISED PER ECO-11-005150	30MAR2011	RK	HMR

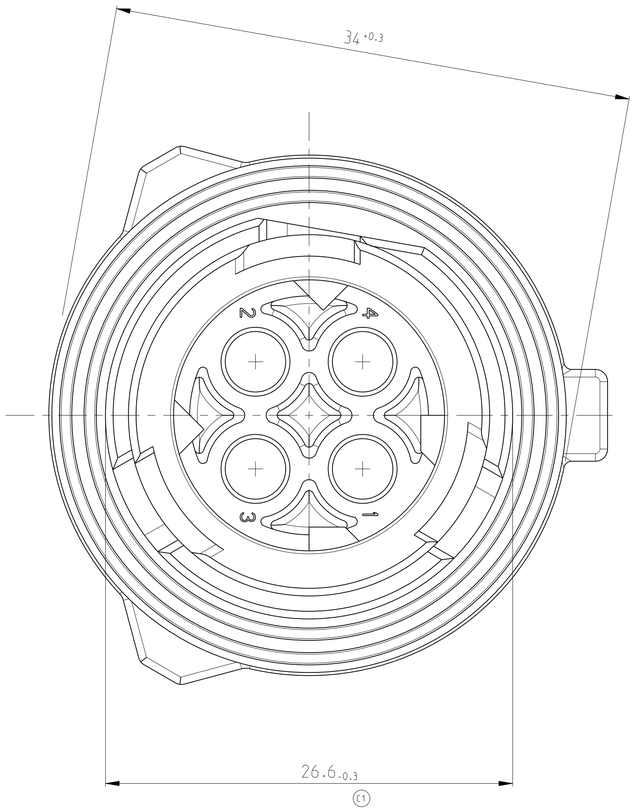

SECTION A-A
Schnitt

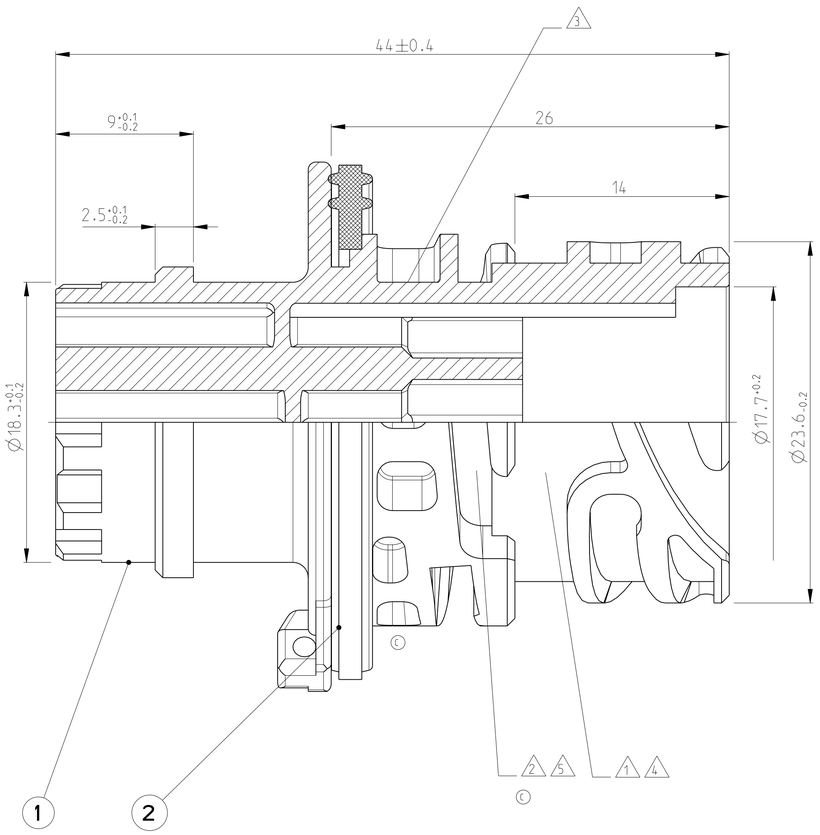

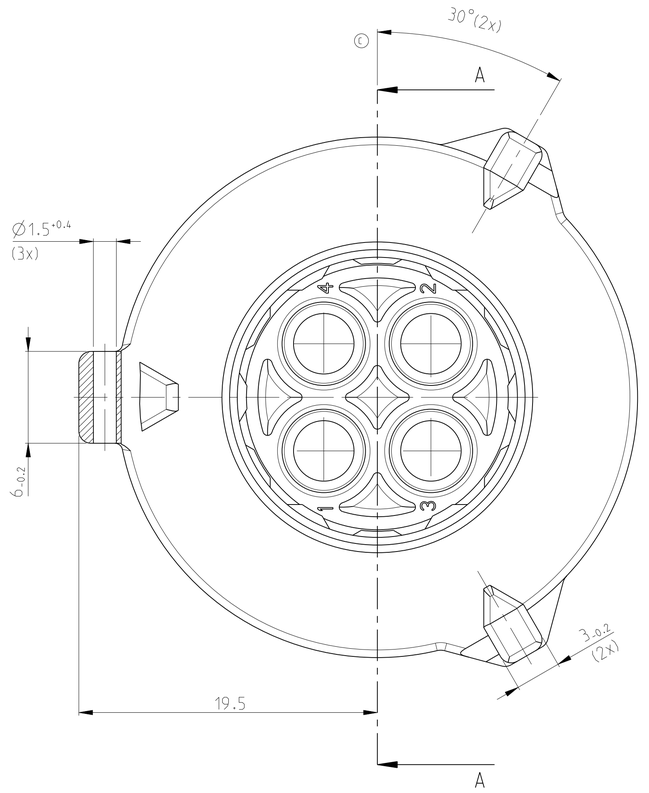

NOTES:
Bemerkungen:

D3 1 AMP OR Tyco Electronics (TE) LOGO AND TE CONNECTIVITY SINGLE PART-NUMBER
AMP oder Tyco Electronics (TE) Logo und TE CONNECTIVITY Einzelteilnummer

2 MATERIAL MARKING
Werkstoffkennzeichnung

3 REVISION OF THE MOULD
Werkzeugaenderungsindex

4 PRODUCTION DATE
Produktionsdatum

5 CAVITY MARKING
Nestmarkierung

6 FOR SUITABLE CONTACTS AND SEALS SEE DRAWING:
Zu verwendende Kontakte und Einzeldichtungen
D3 D1 C1 siehe Tabellenzeichnung:

TE CONNECTIVITY 1355064

C MAX. WIRE THICKNESS: 2.5mm² FLR
max. Drahtgroesse: 2.5mm² FLR

7 PANEL MOUNTING WITH FIXING RING
TE CONNECTIVITY-NO. 965687-1
Hinterwandmontage mit Befestigungsring
TE CONNECTIVITY-Nr. 965687-1

C 8 COUPLING PART ACC. TO DIN 72585 / ISO 15170
Kupplungsseite nach DIN 72585 / ISO 15170

C1 9 IN THE CASE OF NEW DESIGNS, THE DIMENSIONS OF THE CUT OFF SHOULD BE PLACED NEAR THE LOWER TOLERANCE LIMIT
Hinterwandmontage mit Befestigungsring
Bei Neukonstruktionen sollten die Masse des Blechausschnittes an die untere Toleranzgrenze gelegt werden

9 7 CUT OFF
C1 C (MATERIAL THICKNESS: 2.5 +0.1 MM)
Befestigungsausschnitt
(Materialstaerke: 2.5 +0.1 mm)



D1 D2	CODING 4 (BLUE) Kodierung 4 (blau)	CODING 3 (GREEN) Kodierung 3 (gruen)	CODING 2 (GREY) Kodierung 2 (grau)	CODING 1 (BLACK) Kodierung 1 (schwarz)	POS.	QTY Stueck	MATERIAL	COLOUR Farbe	DESCRIPTION Beschreibung
	D	D	D	D	USED CONTACT CAVITIES Kontakthoehlen				
	4-967402-1	3-967402-1	2-967402-3	1-967402-1	ORDER-NO. Bestell-Nr. D3				
	X	X	X	X	1. 2. 3. 4	2	1	SILICONE	GREEN Gruen D SEALING Dichtung
	X	-	-	-	1. 2. 3. 4	1	1	PBT-GF20	BLUE Blau 4POS. PIN HOUSING 4pol. Stiftgehaeuse D2
	-	X	-	-	1. 2	1	1	PBT-GF20	GREEN Gruen 4POS. PIN HOUSING 4pol. Stiftgehaeuse D2
	-	-	X	-	1. 2. 3	1	1	PBT-GF20	GREY Grau 2POS. PIN HOUSING 2pol. Stiftgehaeuse
	-	-	-	X	1. 2. 3. 4	1	1	PBT-GF20	GREY Grau 3POS. PIN HOUSING 3pol. Stiftgehaeuse
	-	-	-	-	1. 2	1	1	PBT-GF20	GREY Grau 4POS. PIN HOUSING 4pol. Stiftgehaeuse
	-	-	-	-	1. 2. 3	1	1	PBT-GF20	BLACK Schwarz 2POS. PIN HOUSING 2pol. Stiftgehaeuse
	-	-	-	-	1. 2. 3. 4	1	1	PBT-GF20	BLACK Schwarz 3POS. PIN HOUSING 3pol. Stiftgehaeuse
	-	-	-	-	1. 2. 3. 4	1	1	PBT-GF20	BLACK Schwarz 4POS. PIN HOUSING 4pol. Stiftgehaeuse

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ACC. TO ISO 8015
1 PLC ±0.2mm
2 PLC ±0.4
3 PLC ±0.8
ANGLES ±2°

MATERIAL SEE TABLE
FINISH SEE TABLE

DWN 06MAR1995 J. GRANZOW
CHK 06MAR1995 J. Hass
APVD 10MAY2010 Ch. Eberwein
PRODUCT SPEC 108-18621-0
APPLICATION SPEC 114-18255-0
WEIGHT 15g

TE Connectivity

NAME 2.5MM PIN HOUSING, 2-4POS., ASSY
2.5mm Stiftstecker, 2-4pol., Assy

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-967402 | RESTRICTED TO -

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV D4

4805 (3/11)

Pro/ENGINEER DRAWING