


VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
	11-50	±0.5
UNIT: mm	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

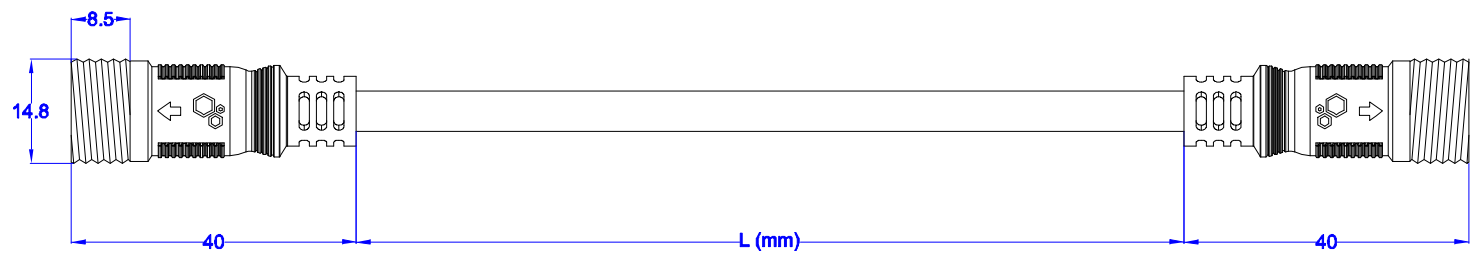

Notes:

- Number Of Contact: 4 Pin
- Contact: Brass Nickel Plated
- Current Rating Percontact: 2,5A
- Voltage Rating: 220V AC
- Contact Resistance: <10M Ω
- Insulation Resistance: 1000M Ω at DC 500V.
- Breakdown Voltage: 1,5KV / 1 minute
- Temperature Rating: -30C°~+70C°
- Durability (Plug/Unplug): 3000 times
- Waterproof Rating: IP67
- Certificate: CE ; ROHS

ORDER CODE:


WP-40FF XXXX XX X

- Color : B: Black W : White
- Cable : Cl: PVC H05VV-F (TTR) 4x0,50mm² O.D: 5,8 ±0.2
- Lenght : L (mm)

No	Material Code	Description	Size (mm)	Q'ty	Unit
6	-	PVC MOLDING (black or white)	-	-	-
5	-	PVC NUT (black or white)	-	1	pc.
4	-	GASKET (red)	-	1	pc.
3	-	TERMINAL - FEMALE	-	2	pcs.
2	-	TERMINAL - MALE	-	2	pcs.
1	-	IEC 62(RVV) 300/300V 4x0,50mm ² CABLE (black or white)	-	2	pcs.

Date	16.12.2016	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No		
Designed by	Yegim AKSOY									WP-40FF 4 Pin Seal Harness		
Checked by	Fatih BOLACA											
										Drawing Nr.	Scale	Sheet No
										-	NONE	1/3

VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
	11-50	±0.5
UNIT: mm	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

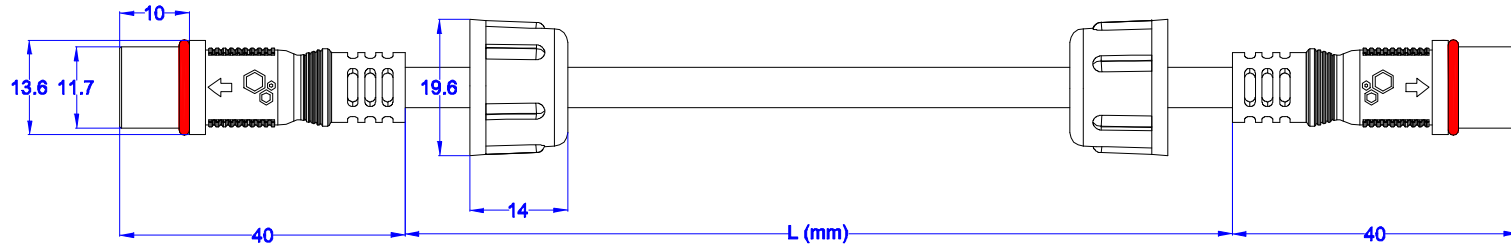

Notes:

Number Of Contact: 4 Pin
 Contact: Brass Nickel Plated
 Current Rating Percontact: 2,5A
 Voltage Rating: 220V AC
 Contact Resistance: <10M Ω
 Insulation Resistance: 1000M Ω at DC 500V.
 Breakdown Voltage: 1,5KV / 1 minute
 Temperature Rating: -30C°~+70C°
 Durability (Plug/Unplug): 3000 times
 Waterproof Rating: IP67
 Certificate: CE ; ROHS

ORDER CODE:

WP-40MM XXXX XX X

→ Color : B: Black W : White

→ Cable : CI: PVC H05VV-F (TTR) 4x0,50mm² O.D: 5,8 ±0.2

→ Length : L (mm)


No	Material Code	Description	Size (mm)	Q'ty	Unit
6	-	PVC MOLDING (black or white)	-	-	-
5	-	PVC NUT (black or white)	-	1	pc.
4	-	GASKET (red)	-	1	pc.
3	-	TERMINAL - FEMALE	-	2	pcs.
2	-	TERMINAL - MALE	-	2	pcs.
1	-	IEC 62(RVV) 300/300V 4x0,50mm ² CABLE (black or white)	-	2	pcs.

Date	16.12.2016	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	
Designed by	Yegim AKSOY	Checked by	Fatih BOLACA	WP-40MM 4 Pin Seal Harness							
Drawing Nr.		Scale	Sheet No								
-		NONE	2/3								



Part No	
WP-40MM 4 Pin Seal Harness	
Drawing Nr.	-
Scale	NONE
Sheet No	2/3

VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
	11-50	±0.5
UNIT: mm	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

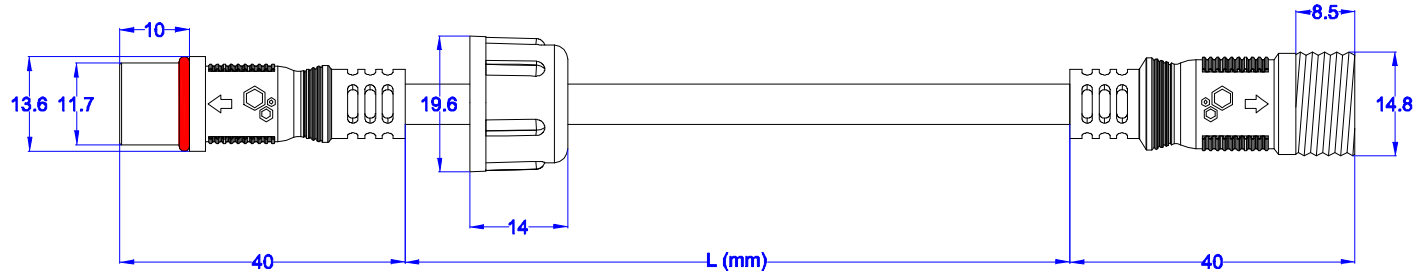

Notes:

Number Of Contact: 4 Pin
 Contact: Brass Nickel Plated
 Current Rating Percontact: 2,5A
 Voltage Rating: 220V AC
 Contact Resistance: <10M Ω
 Insulation Resistance: 1000M Ω at DC 500V.
 Breakdown Voltage: 1,5KV / 1 minute
 Temperature Rating: -30C°~+70C°
 Durability (Plug/Unplug): 3000 times
 Waterproof Rating: IP67
 Certificate: CE ; ROHS

ORDER CODE:

WP-40FM XXXX XX X

→ Color : B: Black W : White

→ Cable : CI: PVC H05VV-F (TTR) 4x0,50mm² O.D: 5,8 ±0.2

→ Lenght : L (mm)

6	-	PVC MOLDING (black or white)	-	-	-
5	-	PVC NUT (black or white)	-	1	pc.
4	-	GASKET (red)	-	1	pc.
3	-	TERMINAL - FEMALE	-	2	pcs.
2	-	TERMINAL - MALE	-	2	pcs.
1	-	IEC 62(RVV) 300/300V 4x0,50mm ² CABLE (black or white)	-	2	pcs.
No	Material Code	Description	Size (mm)	Q'ty	Unit
Date	16.12.2016	Rev.	Revision Detail		Rev.Dt. Rev.by
Designed by	Yegim AKSOY	-			
Checked by	Fatih BOLACA				
					Part No
					WP-40FM 4 Pin Seal Harness
			Drawing Nr.	Scale	Sheet No
			-	NONE	3/3