
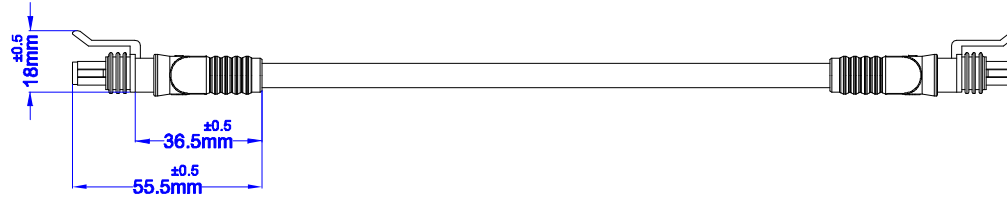


VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
UNIT: mm	11-50	±0.5
	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

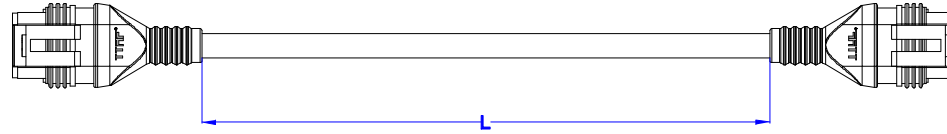

**ORDER CODE:**

WP-42 XX XXXX XX X

Color : B: Black W: White

Cable :

CE: PVC H05VV-F (TTR)	3x0,50 mm <sup>2</sup>	O.D: 5,8 ±0.2
CF: PVC H05VV-F (TTR)	3x0,75 mm <sup>2</sup>	O.D: 7,0 ±0.2
CG: PVC H05VV-F (TTR)	3x1,00 mm <sup>2</sup>	O.D: 7,0 ±0.2
CH: PVC H05VV-F (TTR)	3x1,50 mm <sup>2</sup>	O.D: 8,1 ±0.2
PE: PUR H05VV-F (TTR)	3x0,50 mm <sup>2</sup>	O.D: 5,8 ±0.2
PF: PUR H05VV-F (TTR)	3x0,75 mm <sup>2</sup>	O.D: 7,0 ±0.2
PG: PUR H05VV-F (TTR)	3x1,00 mm <sup>2</sup>	O.D: 7,0 ±0.2
PH: PUR H05VV-F (TTR)	3x1,50 mm <sup>2</sup>	O.D: 8,1 ±0.2

Length : L (mm)

FF : FEMALE TO FEMALE

**Notes:**

1) Connector Specification; Material: PA66+GF  
 Number Of Contacts: 3 pin  
 Temperature Range: -30C°~+70C°  
 Terminal Material: Phosphor Bronze  
 Terminal Plate: Pre-Tin

**Current Rating Per Contact;**


0,5 mm<sup>2</sup> Cable Max. 6A  
 0,75 mm<sup>2</sup> Cable Max. 7A  
 1,00 mm<sup>2</sup> Cable Max. 8A  
 1,50 mm<sup>2</sup> Cable Max. 11A

2) Molding Material: PVC or PUR depends for cable order

3) Housing Part No: 200001-3F  
 Terminal Part No: 200001-TF-C

Date	14.12.2016	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No		
Designed by	Yegim AKSOY											
Checked by	Fatih BOLACA											
										<b>WP-42FF</b>		
										<b>3 Pin Seal Harness</b>		
								Drawing Nr.	Scale	Sheet No		
								-	1:2	1/3		



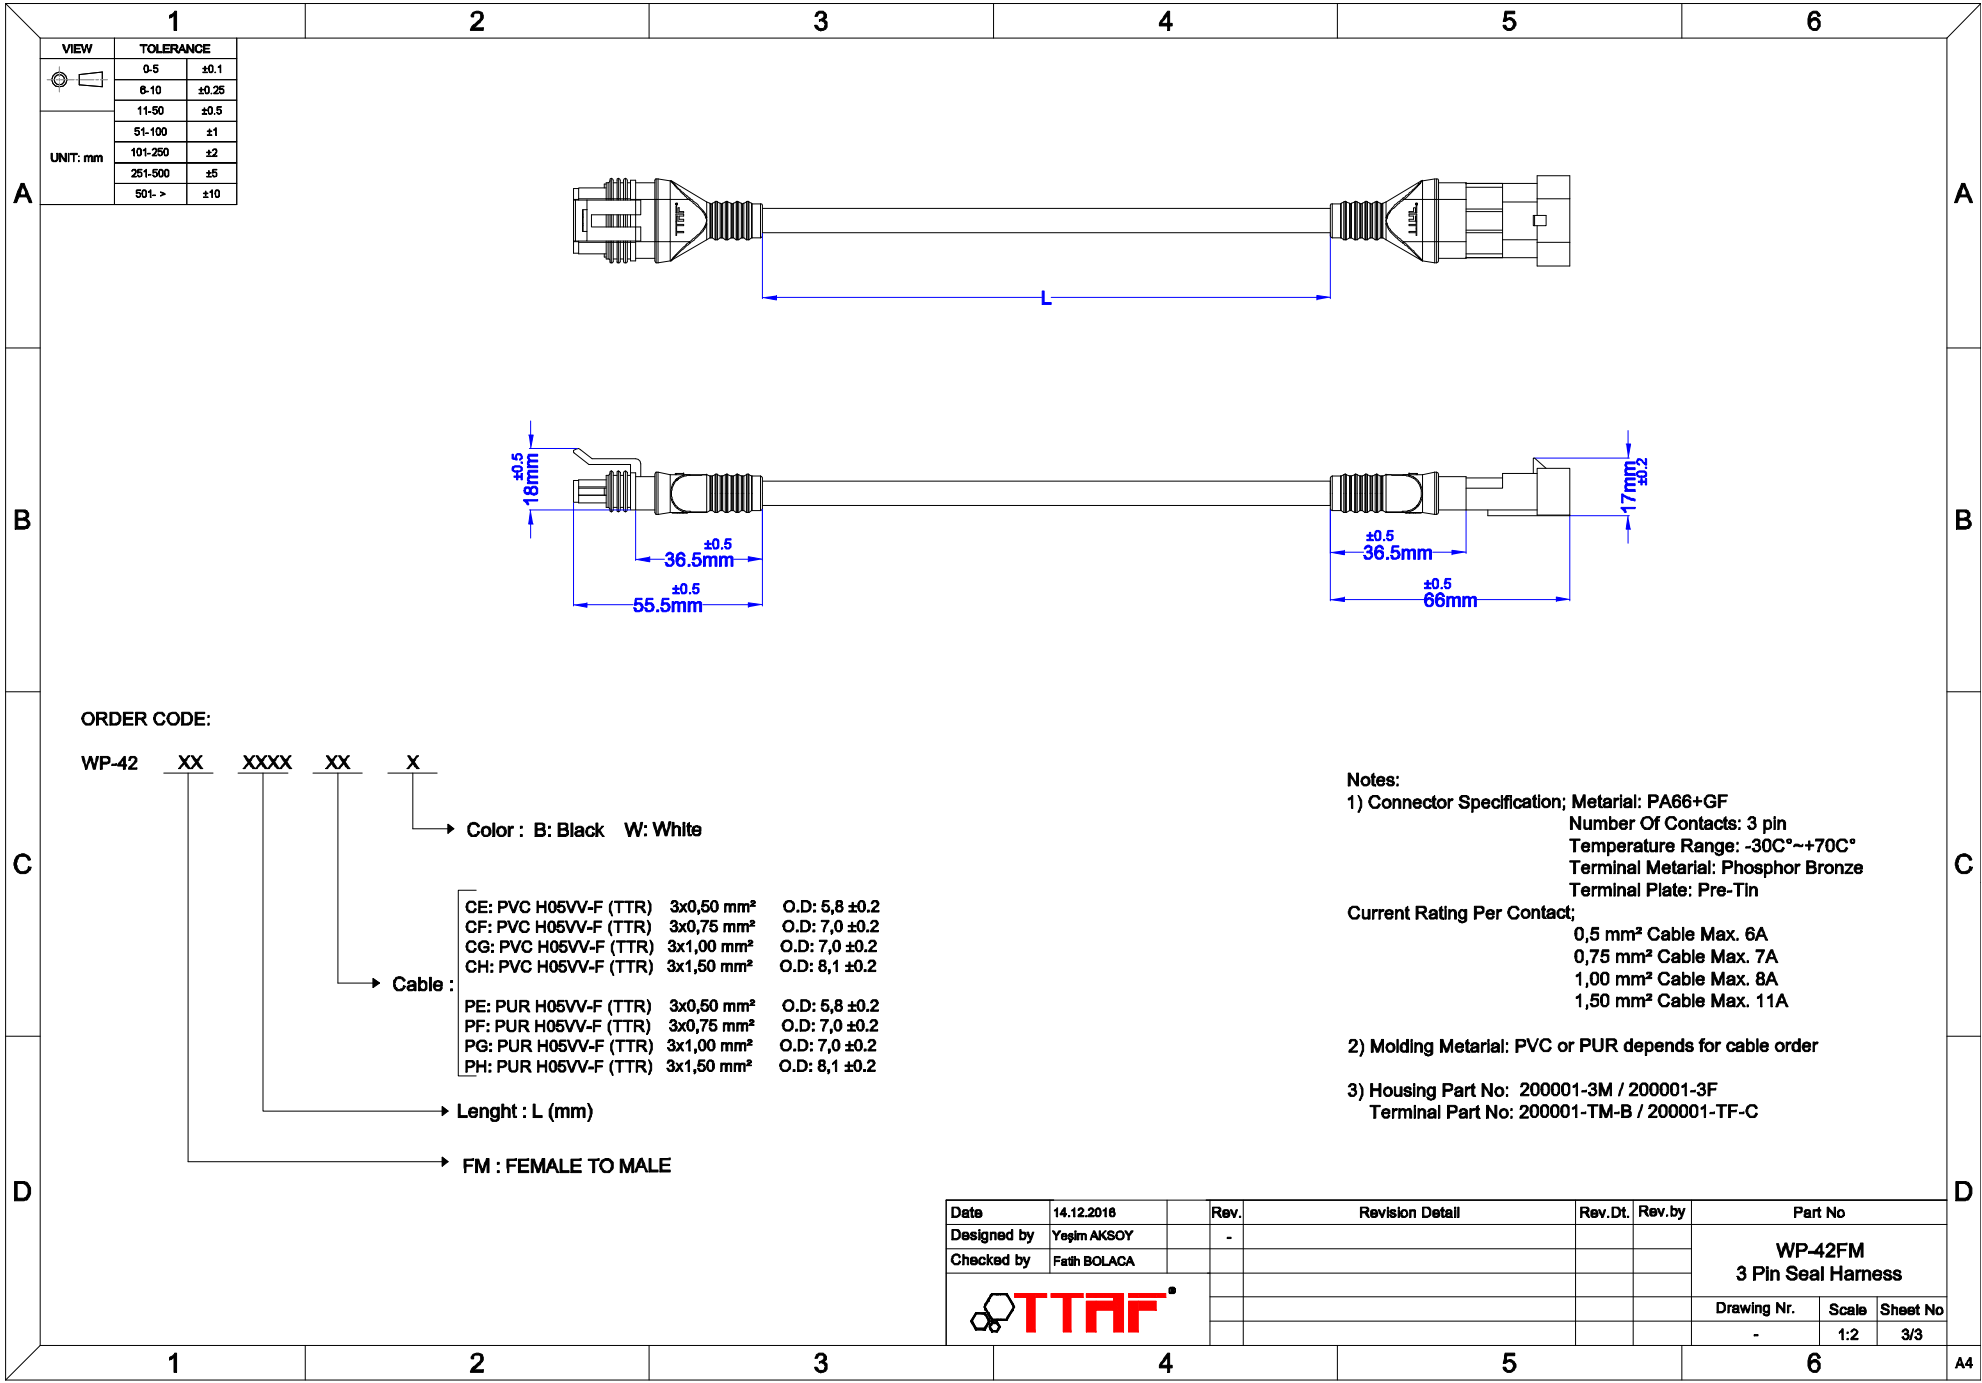

VIEW	TOLERANCE	
	0-5	±0.1
	6-10	±0.25
	11-50	±0.5
	51-100	±1
	101-250	±2
	251-500	±5
	501- >	±10

UNIT: mm

**ORDER CODE:**

WP-42    XX    XXXX    XX    X

→ Color : B: Black    W: White

→ Cable :

CE: PVC H05VV-F (TTR)	3x0,50 mm <sup>2</sup>	O.D: 5,8 ±0.2
CF: PVC H05VV-F (TTR)	3x0,75 mm <sup>2</sup>	O.D: 7,0 ±0.2
CG: PVC H05VV-F (TTR)	3x1,00 mm <sup>2</sup>	O.D: 7,0 ±0.2
CH: PVC H05VV-F (TTR)	3x1,50 mm <sup>2</sup>	O.D: 8,1 ±0.2
PE: PUR H05VV-F (TTR)	3x0,50 mm <sup>2</sup>	O.D: 5,8 ±0.2
PF: PUR H05VV-F (TTR)	3x0,75 mm <sup>2</sup>	O.D: 7,0 ±0.2
PG: PUR H05VV-F (TTR)	3x1,00 mm <sup>2</sup>	O.D: 7,0 ±0.2
PH: PUR H05VV-F (TTR)	3x1,50 mm <sup>2</sup>	O.D: 8,1 ±0.2

→ Length : L (mm)

→ FM : FEMALE TO MALE

**Notes:**

- Connector Specification; Material: PA66+GF  
 Number Of Contacts: 3 pin  
 Temperature Range: -30C°~+70C°  
 Terminal Material: Phosphor Bronze  
 Terminal Plate: Pre-Tin  
 Current Rating Per Contact;  
 0,5 mm<sup>2</sup> Cable Max. 6A  
 0,75 mm<sup>2</sup> Cable Max. 7A  
 1,00 mm<sup>2</sup> Cable Max. 8A  
 1,50 mm<sup>2</sup> Cable Max. 11A
- Molding Material: PVC or PUR depends for cable order
- Housing Part No: 200001-3M / 200001-3F  
 Terminal Part No: 200001-TM-B / 200001-TF-C

Date	14.12.2016	Rev.	-	Revision Detail		Rev.Dt.		Rev.by		Part No	
Designed by	Yegim AKSOY	Checked by	Fatih BOLACA								
										<b>WP-42FM</b> <b>3 Pin Seal Harness</b>	
										Drawing Nr.	-
										Scale	1:2
										Sheet No	3/3