


| VIEW     | TOLERANCE |       |
|----------|-----------|-------|
|          | 0-5       | ±0.1  |
|          | 6-10      | ±0.25 |
|          | 11-50     | ±0.5  |
| UNIT: mm | 51-100    | ±1    |
|          | 101-250   | ±2    |
|          | 251-500   | ±5    |
|          | 501- >    | ±10   |

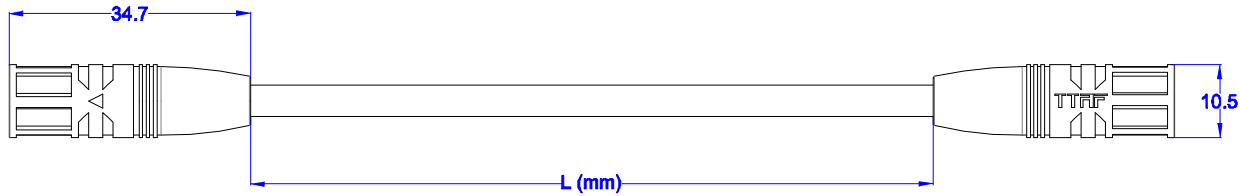

**Notes:**


**Number Of Contact:** 2 Pin  
**Contact:** Brass Nickel Plated  
**Current Rating Percontact:** 2A  
**Voltage Rating:** 250V AC  
**Contact Resistance:** <10M Ω  
**Insulation Resistance:** 1000M Ω at DC 500V.  
**Breakdown Voltage:** 1,5KV / 1 minute  
**Temperature Rating:** -30C°~+70C°  
**Durability (Plug/Unplug):** 3000 times  
**Waterproof Rating:** IP67  
**Certificate:** CE ; ROHS

**ORDER CODE:**

WP-44FF XXXX XX X  
 ↳ Color : B: Black W : White  
 ↳ Cable : BA: PVC H05VV-F (TTR) 2x0,50mm² O.D: 5,0 ±0.2  
 ↳ Lenght : L (mm)

| 4           | -             | PVC MOLDING / BLACK            | -   | -    | -              |
|-------------|---------------|--------------------------------|---|------|----------------|
| 3           | -             | 2 PIN FEMALE CONNECTOR / BLACK | -   | 1    | pc.            |
| 2           | -             | 2 PIN MALE CONNECTOR / BLACK   | -   | 1    | pc.            |
| 1           | KBL-9046      | 2x0.36mm² CABLE / BLACK        | -   | -    | -              |
| No          | Material Code | Description                    | Size (mm)                                   | Q'ty | Unit           |
| Date        | 16.12.2016    | Rev.                           | Revision Detail                             |      | Rev.Dt. Rev.by |
| Designed by | Yegim AKSOY   | -                              |   |      |                |
| Checked by  | Fatih BOLACA  |                                |   |      |                |
|             |               |                                | <b>WP-44FF</b><br><b>2 Pin Seal Harness</b> |      |                |
|             |               |                                |   |      |                |
|             |               |                                | -   | NONE | 1/3            |

| VIEW     | TOLERANCE |       |
|----------|-----------|-------|
|          | 0-5       | ±0.1  |
|          | 6-10      | ±0.25 |
|          | 11-50     | ±0.5  |
| UNIT: mm | 51-100    | ±1    |
|          | 101-250   | ±2    |
|          | 251-500   | ±5    |
|          | 501- >    | ±10   |

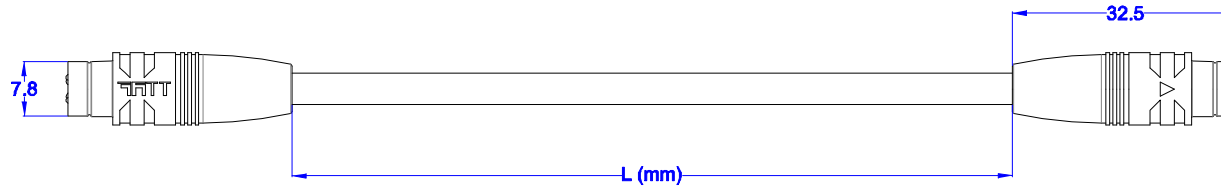

**Notes:**


**Number Of Contact:** 2 Pin  
**Contact:** Brass Nickel Plated  
**Current Rating Percontact:** 2A  
**Voltage Rating:** 250V AC  
**Contact Resistance:** <10M Ω  
**Insulation Resistance:** 1000M Ω at DC 500V.  
**Breakdown Voltage:** 1,5KV / 1 minute  
**Temperature Rating:** -30C°~+70C°  
**Durability (Plug/Unplug):** 3000 times  
**Waterproof Rating:** IP67  
**Certificate:** CE ; ROHS

**ORDER CODE:**

WP-44MM XXXX XX X  
 → Color : B: Black W : White  
 → Cable : BA: PVC H05VV-F (TTR) 2x0,50mm² O.D: 5,0 ±0.2  
 → Lenght : L (mm)

| 4           | -             | PVC MOLDING / BLACK            | -   | -    | -              |
|-------------|---------------|--------------------------------|---|------|----------------|
| 3           | -             | 2 PIN FEMALE CONNECTOR / BLACK | -   | 1    | pc.            |
| 2           | -             | 2 PIN MALE CONNECTOR / BLACK   | -   | 1    | pc.            |
| 1           | KBL-9046      | 2x0.36mm² CABLE / BLACK        | -   | -    | -              |
| No          | Material Code | Description                    | Size (mm)                                   | Q'ty | Unit           |
| Date        | 16.12.2016    | Rev.                           | Revision Detail                             |      | Rev.Dt. Rev.by |
| Designed by | Yegim AKSOY   | -                              |   |      |                |
| Checked by  | Fatih BOLACA  |                                |   |      |                |
|             |               |                                | <b>WP-44MM</b><br><b>2 Pin Seal Harness</b> |      |                |
|             |               |                                |   |      |                |
|             |               |                                | -   | NONE | 2/3            |

| VIEW     | TOLERANCE |       |
|----------|-----------|-------|
|          | 0-5       | ±0.1  |
|          | 6-10      | ±0.25 |
|          | 11-50     | ±0.5  |
| UNIT: mm | 51-100    | ±1    |
|          | 101-250   | ±2    |
|          | 251-500   | ±5    |
|          | 501- >    | ±10   |

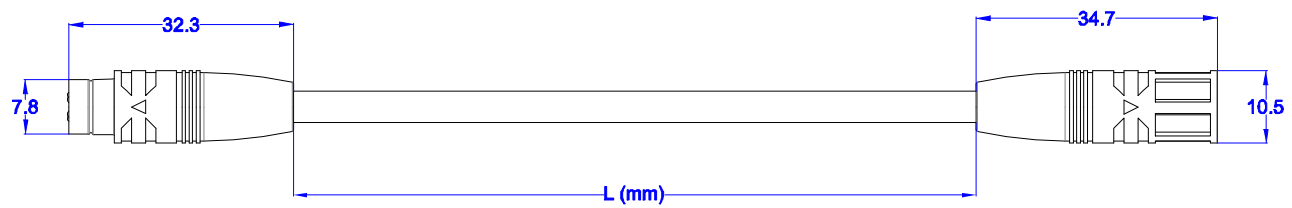

**Notes:**

- Number Of Contact: 2 Pin
- Contact: Brass Nickel Plated
- Current Rating Percontact: 2A
- Voltage Rating: 250V AC
- Contact Resistance: <10M Ω
- Insulation Resistance: 1000M Ω at DC 500V.
- Breakdown Voltage: 1,5KV / 1 minute
- Temperature Rating: -30C°~+70C°
- Durability (Plug/Unplug): 3000 times
- Waterproof Rating: IP67
- Certificate: CE ; ROHS

**ORDER CODE:**

WP-44FM XXXX XX X

- Color : B: Black W : White
- Cable : BA: PVC H05VV-F (TTR) 2x0,50mm² O.D: 5,0 ±0.2
- Lenght : L (mm)

| No | Material Code | Description                    | Size (mm) | Q'ty | Unit |
|----|---------------|--------------------------------|-----------|------|------|
| 4  | -             | PVC MOLDING / BLACK            | -         | -    | -    |
| 3  | -             | 2 PIN FEMALE CONNECTOR / BLACK | -         | 1    | pc.  |
| 2  | -             | 2 PIN MALE CONNECTOR / BLACK   | -         | 1    | pc.  |
| 1  | KBL-9046      | 2x0.36mm² CABLE / BLACK        | -         | -    | -    |

| Date        | 16.12.2016   | Rev. | - | Revision Detail |  | Rev.Dt. |  | Rev.by      |       | Part No                               |  |
|-------------|--------------|------|---|-----------------|--|---------|--|-------------|-------|---------------------------------------|--|
| Designed by | Yegim AKSOY  |      |   |                 |  |         |  |             |       |                                       |  |
| Checked by  | Fatih BOLACA |      |   |                 |  |         |  |             |       |                                       |  |
| <b>TTAF</b> |              |      |   |                 |  |         |  |             |       | <b>WP-44FM<br/>2 Pin Seal Harness</b> |  |
|             |              |      |   |                 |  |         |  | Drawing Nr. | Scale | Sheet No                              |  |
|             |              |      |   |                 |  |         |  | -           | NONE  | 3/3                                   |  |